



TECHNICAL SPECIFICATIONS

Dimensions: 54-56 cm seat centres
50 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 60mm. Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concelaed floor fixation system.


Armrest: Rounded texturized injected polypropylene.

Volume: 0.160 m³/unit


Weight: 18.80 Kg not assembled



DRAWING

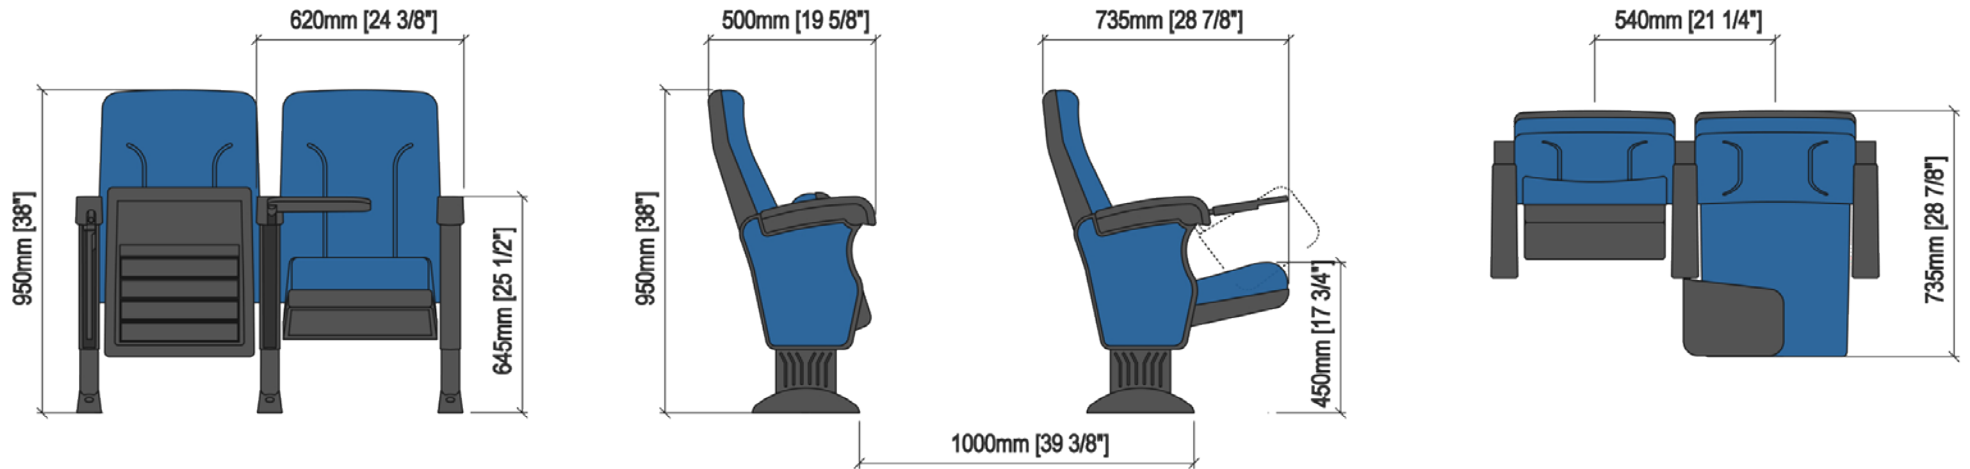

OPTIONS

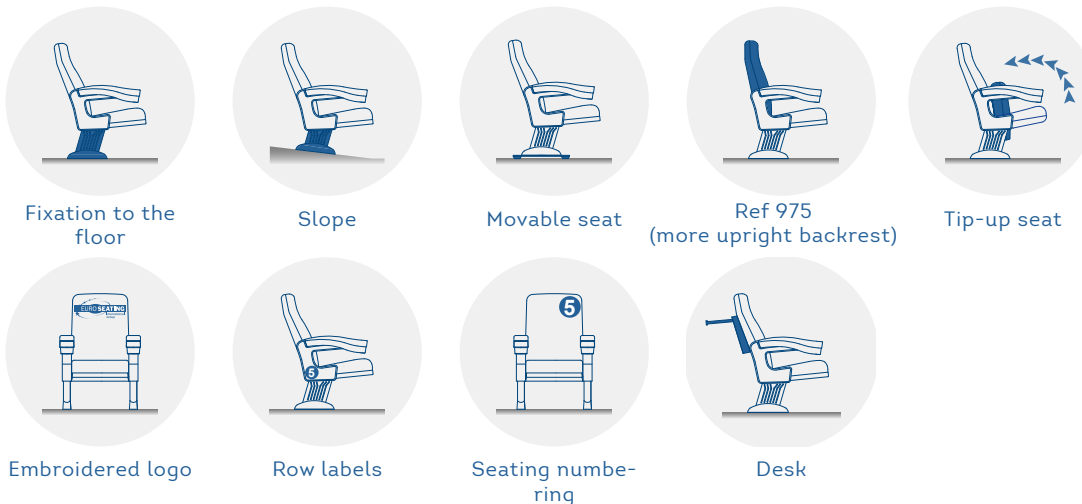

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

| Fabric | Fire barrier | Foam | Seat |
|--------|--------------|------|------|
| • | | | |
| • | | | |
| • | | | |
| • | • | | |
| • | • | • | • |
| | • | | |



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.