

TECHNICAL SPECIFICATIONS



Dimensions: 54-56 cm seat centres
51.5 cm depth
92 cm height

Backrest: Fully upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by a compressed wood cover. Foam density, 40 Kg/m³

Seat: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block upholstered by means of a fabric cover is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood. Foam density, 40 Kg/m³


Side panel: Wood fibres board, finish in beech. Concealed floor fixation system by means of a steel plinth.

Armrest: Round-shaped varnished solid wood.


Volume: 0.100 m³/unit

Weight: 10.50 Kg

DRAWING

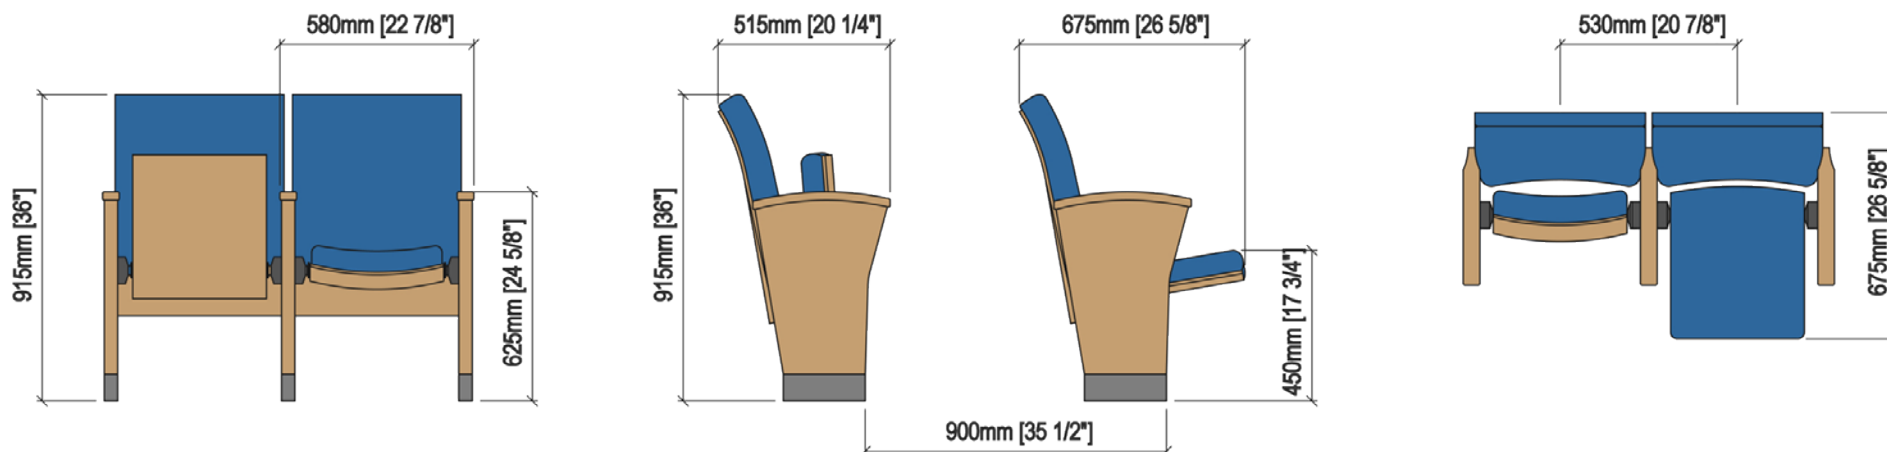

OPCIONES

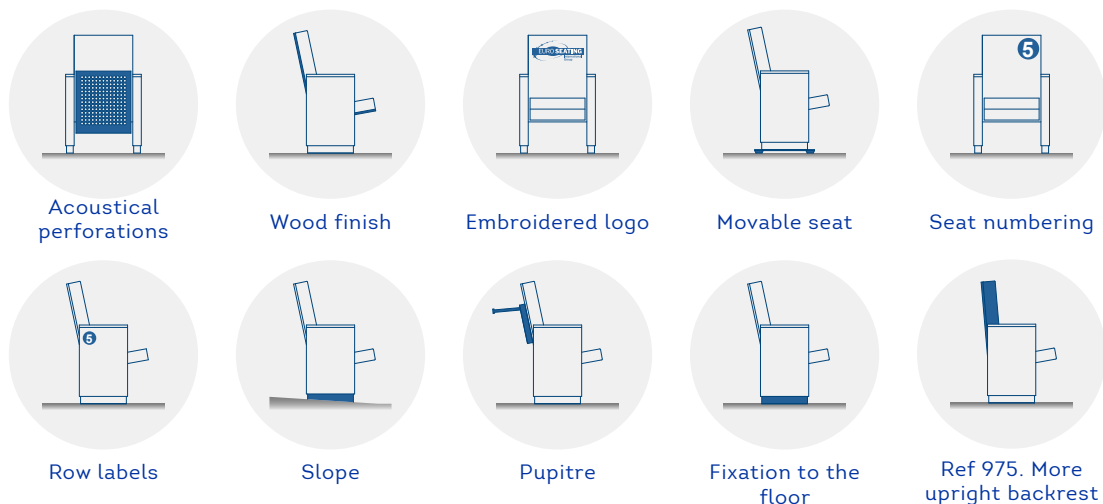

CERTIFICADOS

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VITRIS

fmo
FEDERATION OF
MODERN OFFICE
DESIGNERS



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.