

TECHNICAL SPECIFICATIONS

Dimensions: 54 - 58 cm seat centres
84 cm depth
110 cm height

Backrest: Completely upholstered by means of a leather cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. All this structure is protected by an upholstered wood cover.
Foam density, 40 Kg/m³

Seat: Fully upholstered by means of a leather cover, made up of an open cell polyurethane foam block and a solid wood frame with thin canvas strips. When the seat unfolds, the backrest leans and raises, thus adopting a standard position, everything in a same single synchronized movement.
Foam density, 40 Kg/m³.

Side panel: Wood structure completely upholstered. Concealed floor fixation system by means of a steel plinth.


Armrest: Included in the very side panel.

Volume: 0.140 m³/unit


Weight: 25.00 Kg not assembled



DRAWING

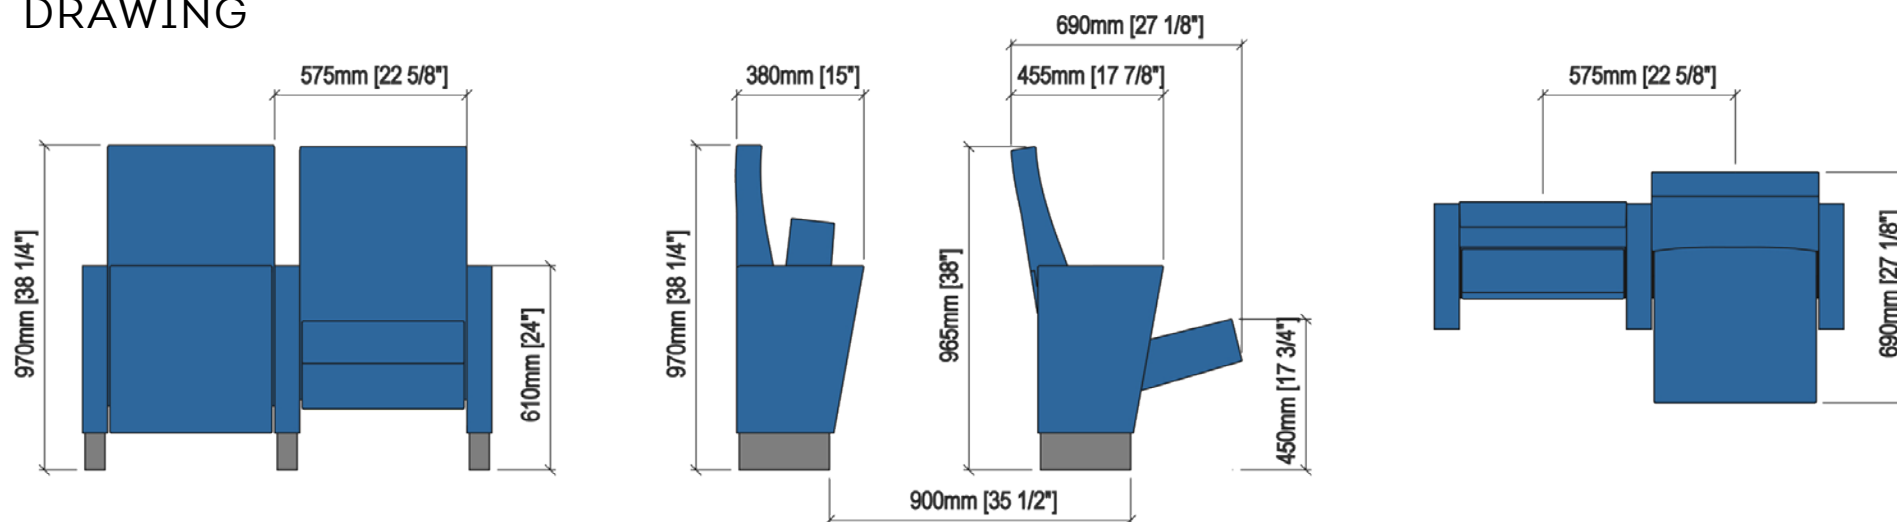

OPTIONS

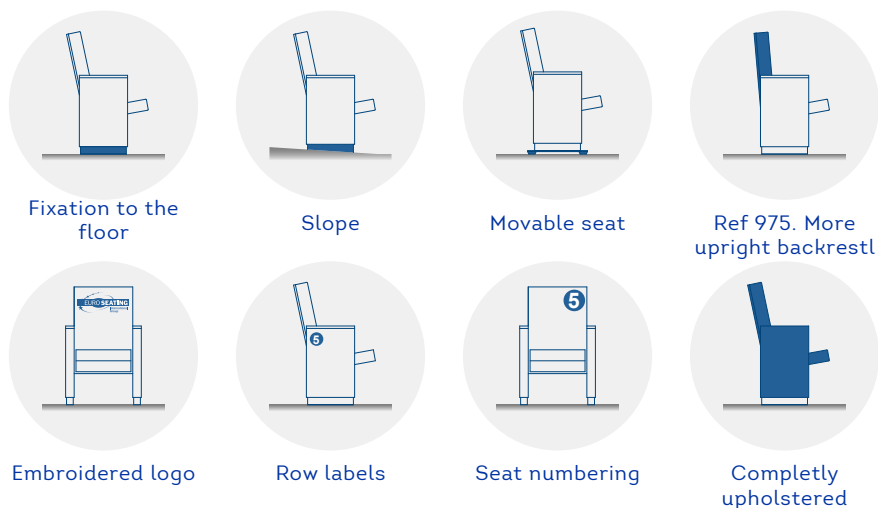

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		