



TECHNICAL SPECIFICATIONS



Dimensions: 54 a 56 cm ancho entre ejes
50 cm largo
95 cm alto

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.


Side panel: Texturized injected polypropylene, 60mm. Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concelaed floor fixation system.

Armrest: Rounded texturized injected polypropylene.

Volume: 0.16 m³ / unit

Weight: 18.80 Kg not assembled

DRAWING

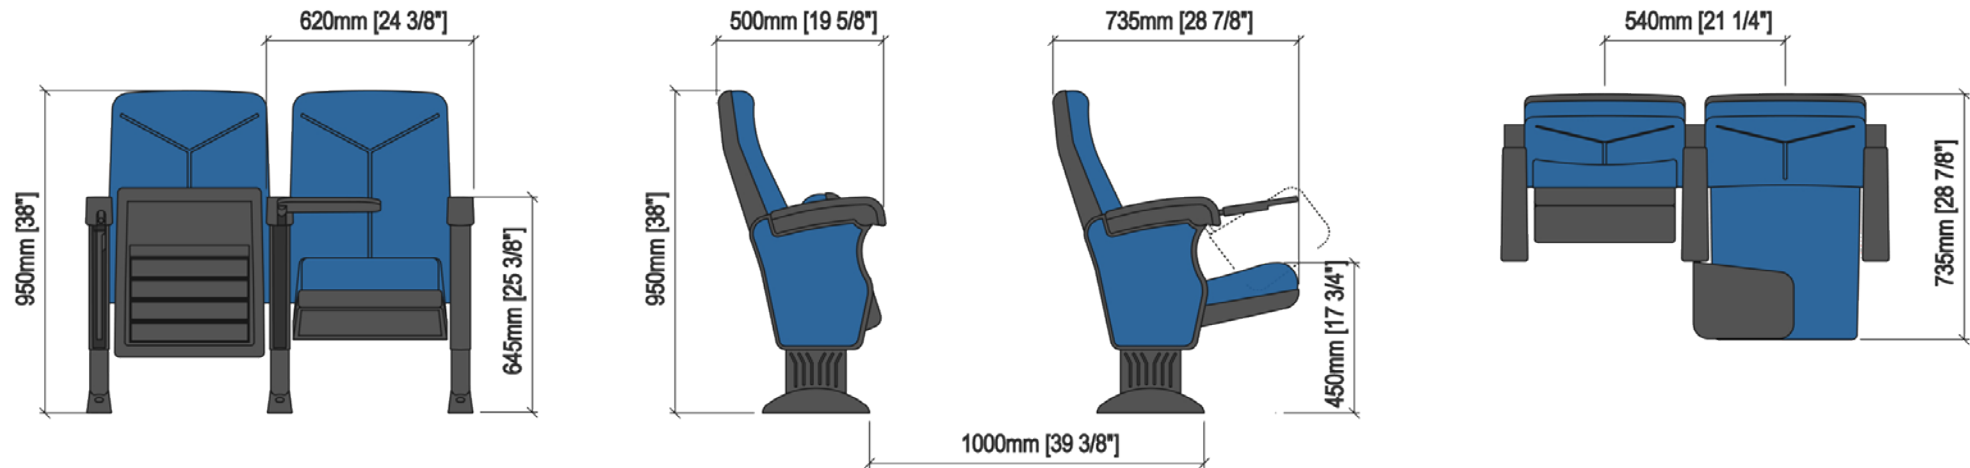

OPTIONS



CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 IR (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.