

BRISTOL LYF (Ref.25)

TECHNICAL SPECIFICATIONS



Dimensions: 54-56 cm seat centres
51.5 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system. Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Extrusion blow moulded in texturized high-density polyethylene, 60mm. End row panels by laminated 3D finish with LYF system. Concealed floor fixation system.

Armrest: Optionally in laminated 3D finish with LYF system.


Volume: 0.170 m³ /unit

Weight: 21.00 Kg not assembled




BRISTOL LYF (Ref.25)

DRAWING

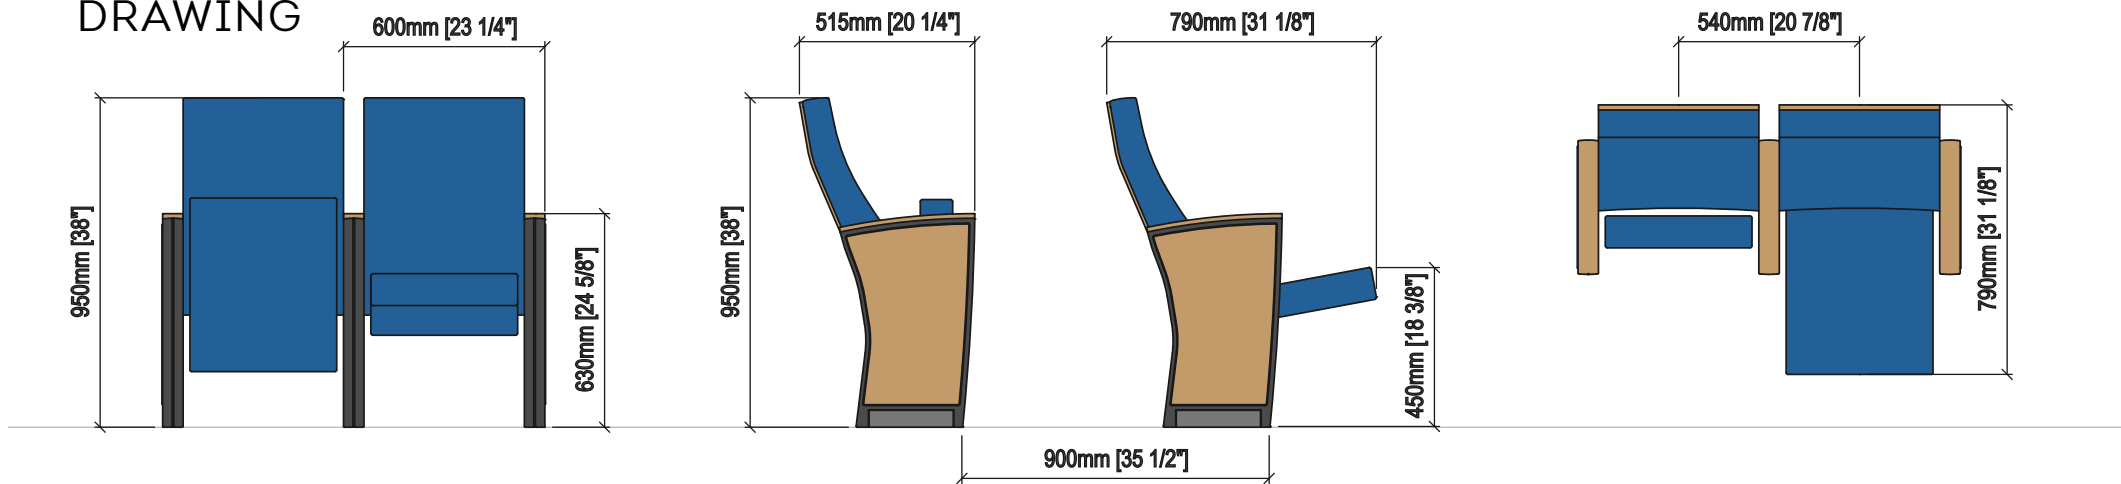

OPTIONS

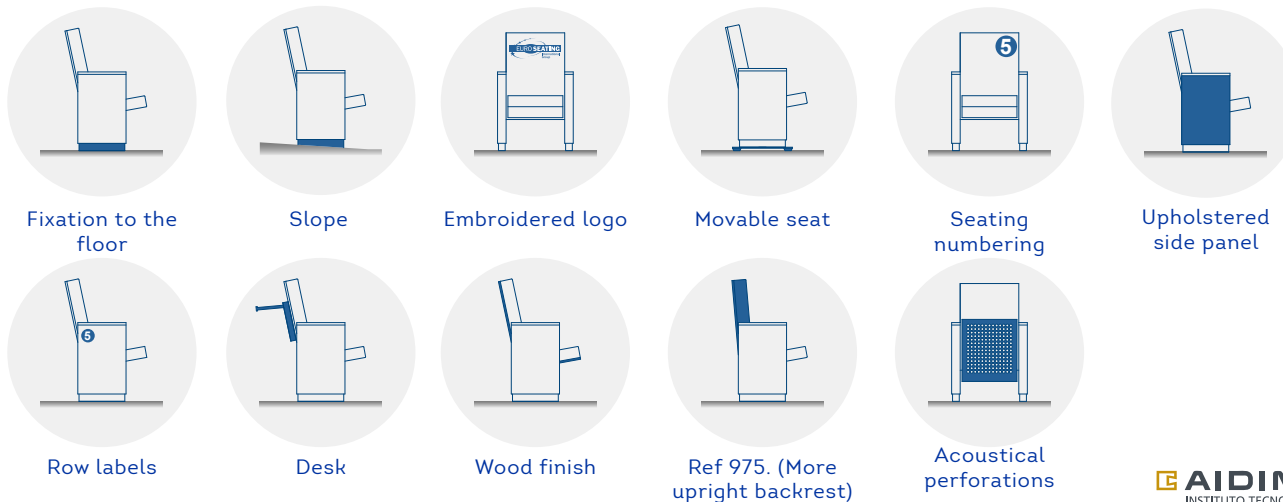

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.