

BRISTOL PLUS PL

TECHNICAL SPECIFICATIONS



Dimensions: 55 - 56 cm seat centres
54 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system or by wood. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³. 65 Kg/m³.

Side panel: Texturized injected polypropylene, 70mm. Antipanic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels by laminated 3D finish with LYF system. Optional upholstered end row panels. Concealed floor fixation system.


Armrest: Rectangular texturized injected polypropylene, Optional; by LYF System or wood.

Volume: 0.150 m³/unit


Weight: 17.00 Kg not assembled

BRISTOL PLUS PL

DRAWING

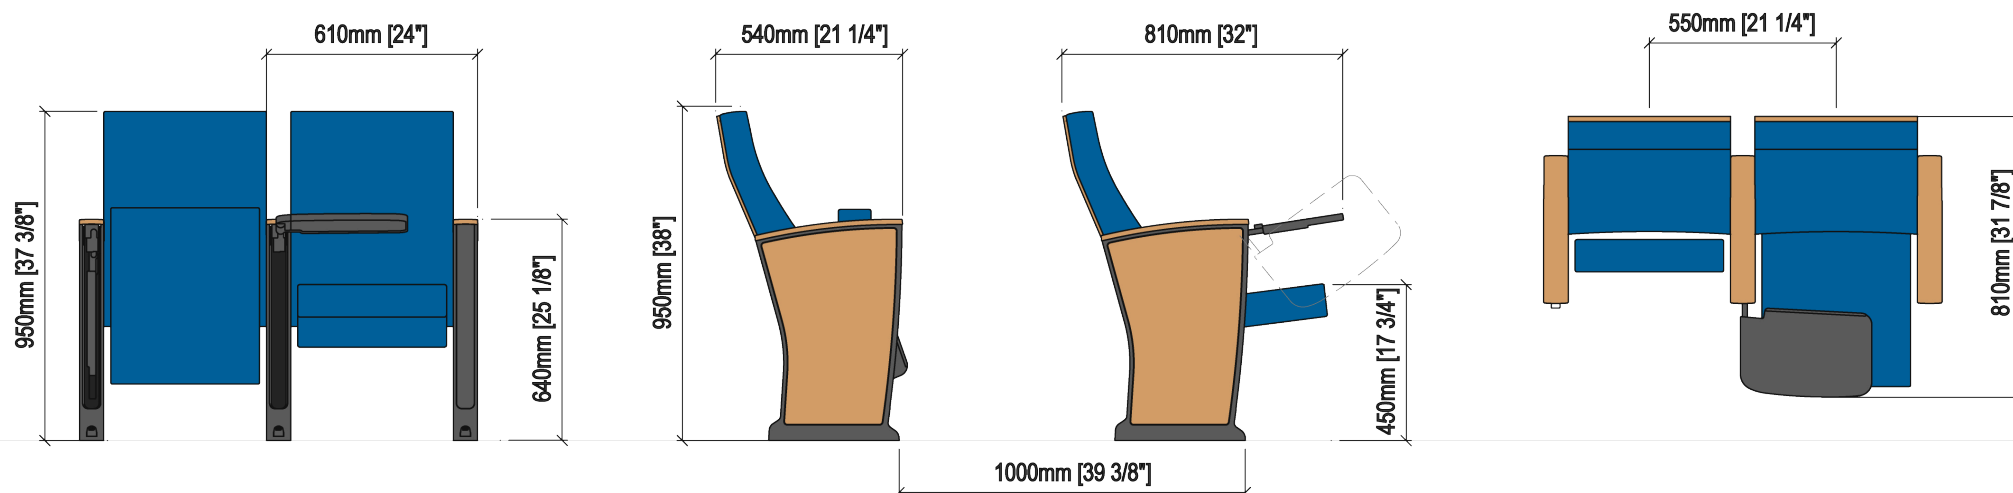

OPTIONS

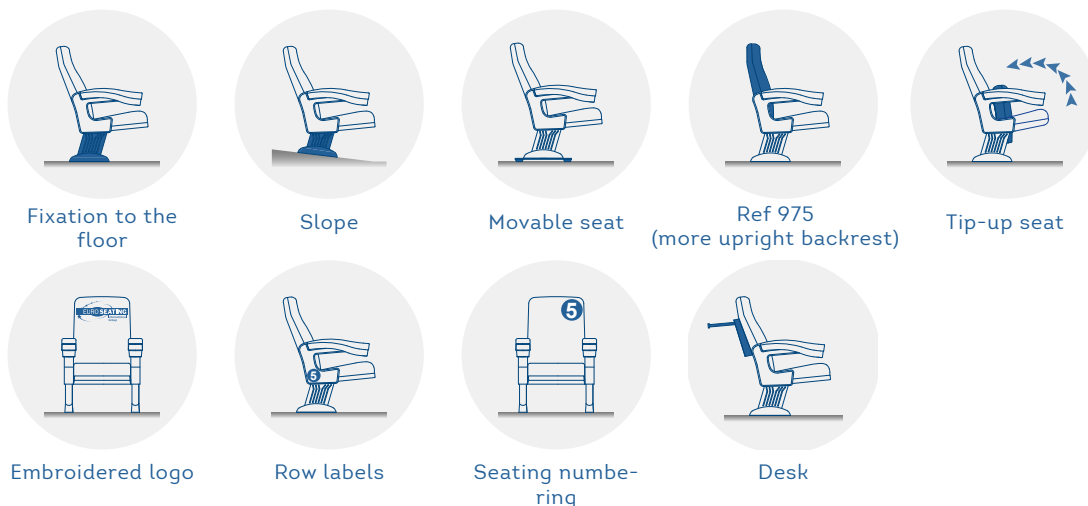

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 IR (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

ffmo
FEDERATION OF FURNITURE
MANUFACTURERS OF EUROPE



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.