

TECHNICAL SPECIFICATIONS



Dimensions: 55-57 cm seat centres
48.5 cm depth
97 cm height

Backrest: Beech solid wood structure over which a MDF board is fixed and in turn, an open cell polyurethane foam block, upholstered by means of a fabric cover, is also fixed. Foam density, 40 Kg/m³

Seat: Cold moulded polyurethane foam which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Wood fibres board, finish in beech. Concealed floor fixation system by means of a steel plinth.


Armrest: Included in the very side panel.

Volume: 0.14 m³ por unidad


Weight: 25.50 Kg desmontada



DRAWING

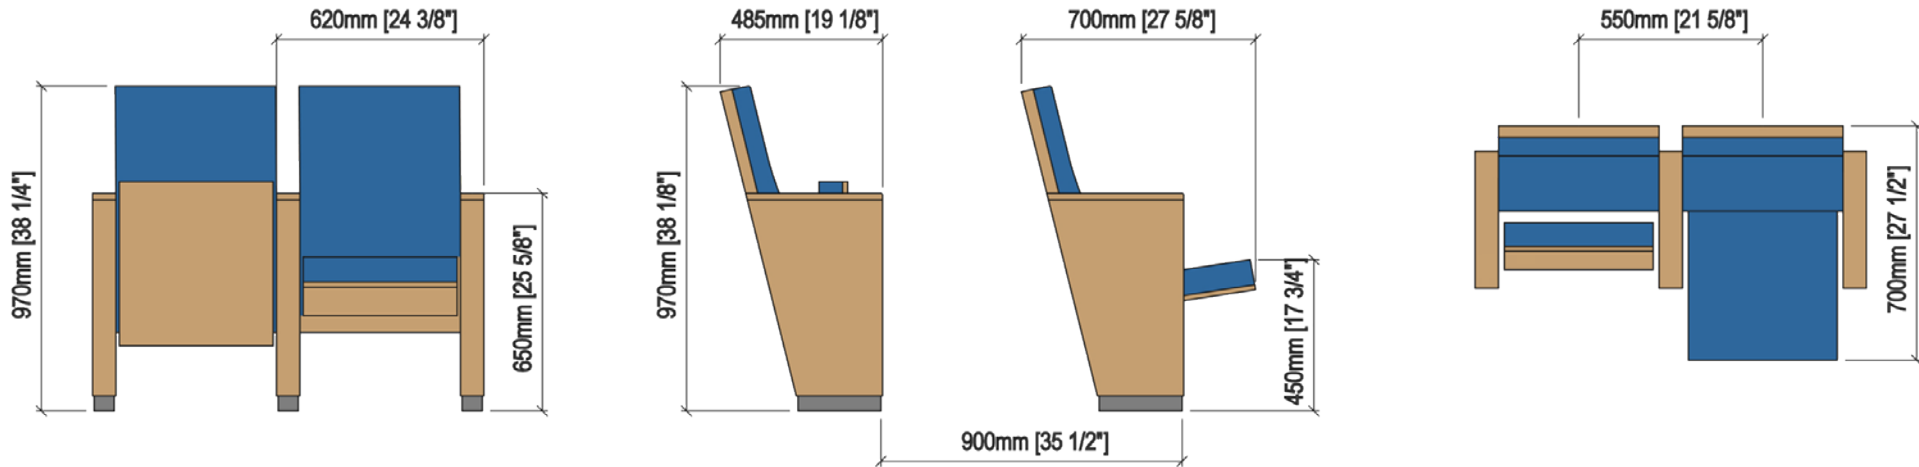

OPTIONS

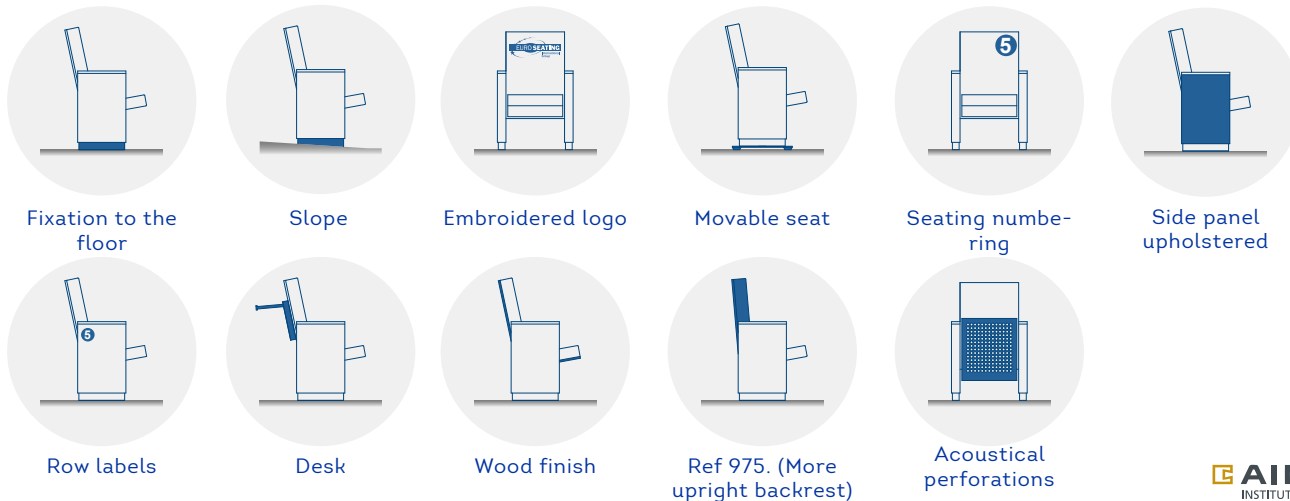

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

| Fabrics | Fire Barrier | Foam | Seat |
|---------|--------------|------|------|
| • | | | |
| • | | | |
| • | | | |
| • | • | | |
| • | • | • | • |
| | • | | |



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.