

TECHNICAL SPECIFICATIONS



Dimensions: 52 - 54 cm seat centres
52 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell.
The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³

Side panel: Texturized injected polypropylene, 40mm
End row panels completely upholstered
Concealed floor fixation system.


Armrest: Rounded texturized injected polypropylene

Volume: 0.14 m³ / unit


Weight: 16.80 Kg not assembled



DIMENSIONS AND DRAWING

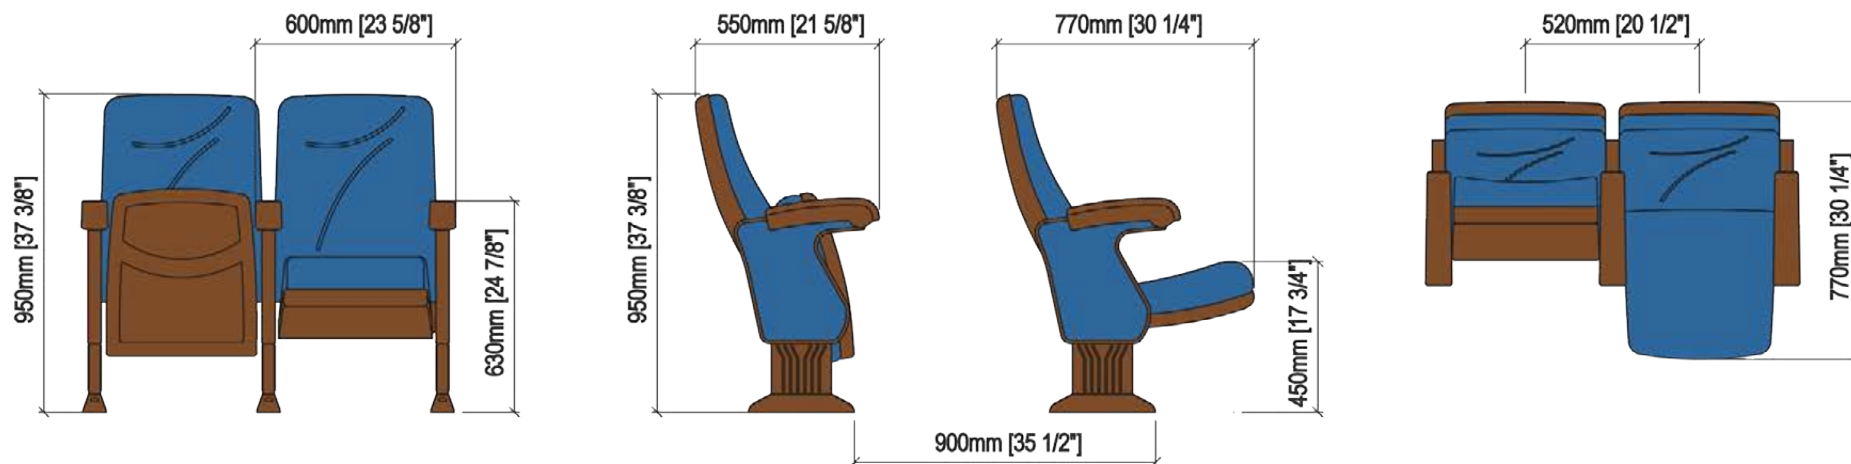

OPTIONS

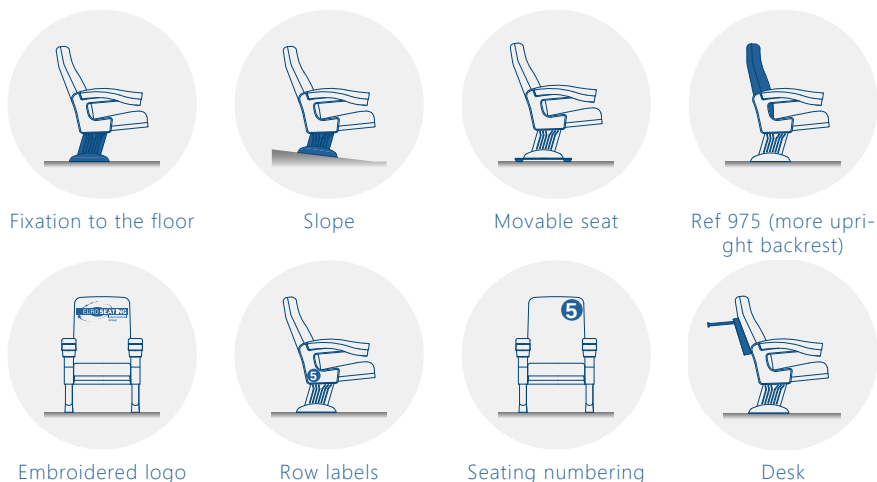

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	



Électricité de France. París. FRANCE



Auditorio Arca Continental. Monterrey.
MEXICO



Iglesia. Vila Nova De Gaia. PORTUGAL

EURO SEATING AROUND THE WORLD

