




TECHNICAL SPECIFICATIONS


- Dimensions:** 48 - 55 cm seat centres
40 cm depth
95 cm height
- Backrest:** Extrusion blow moulded in texturized high-density polyethylene. Structure fixed over an open cell polyurethane foam block fully upholstered by means of a fabric cover. It fits into the lateral parts of the side panel.
Foam density, 40 Kg/m³
- Seat:** Extrusion blow moulded in texturized high-density polyethylene. Structure fixed over an open cell polyurethane foam block fully upholstered by means of a fabric cover. The folding takes places automatically under gravity.
Foam density, 40 Kg/m³.
- Side panel:** Texturized injected polypropylene, reinforced with glass fibre.
Concealed floor fixation system.
- Armrest:** Included in the very side panel.
- Volume:** 0.090 m³/unit
- Weigh:** 11.30 Kg not assembled

ES 700 TT

DRAWING

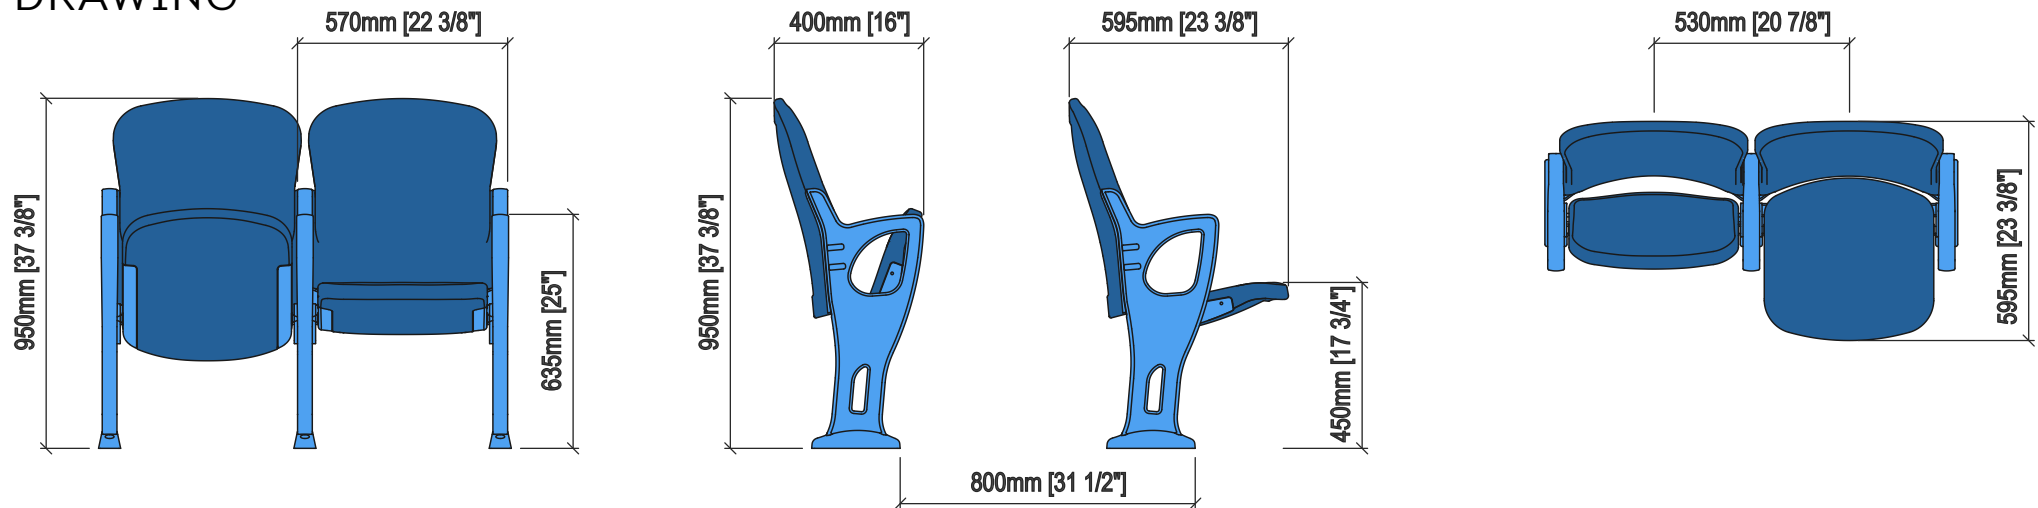


OPTIONS

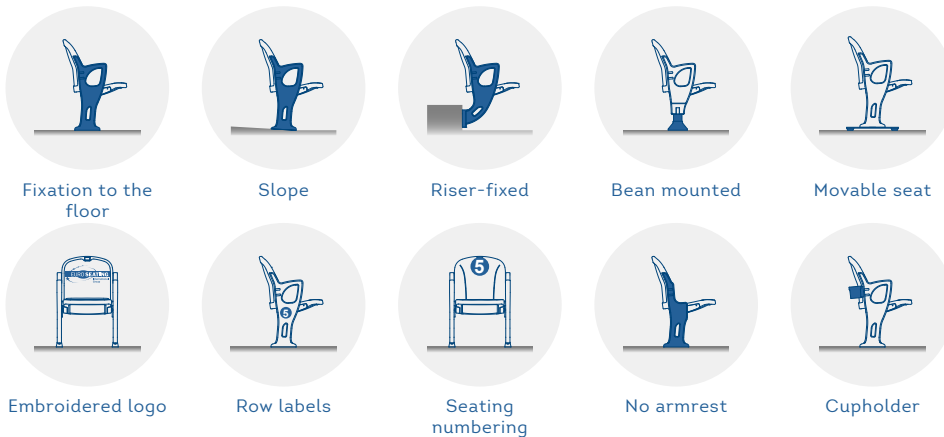

CERTIFICATES

BS 5852:2006
 BS-EN 1021-1:2006
 CAL TB 117-2013, SECTION 1
 UNE 23.727-90 1R (M1)
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
 BS 5852:1979 Parte 1
 UNE 23.727-90 1R (M2 / M3) Opcional
 UNE EN 12727:01 Uso Público Severo (Nivel 4)

Fabrics Fire barrier Foam Plastic Seat

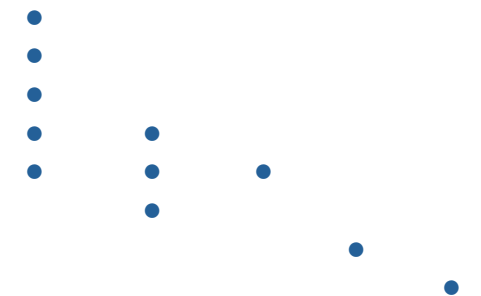

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.