



# FULL RECLINER R10

## TECHNICAL SPECIFICATIONS

**Recliner model with electrical motorized footrest.**

**Dimensions:** 66 cm seat centres  
93 - 155 cm depth  
110 cm height

**Backrest:** Completely upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a beech solid wood frame with thin canvas strips. All this structure is protected by an upholstered wood cover. Foam density, 40 Kg/m<sup>3</sup>.

**Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m<sup>3</sup>. Electrical motor included that raises the footrest.

**Side panel:** Wood structure fully upholstered. Concealed floor fixation system.


**Volume:** 0.210 m<sup>3</sup>

**Weight:** 68 Kg




# FULL RECLINER R10

## DRAWING

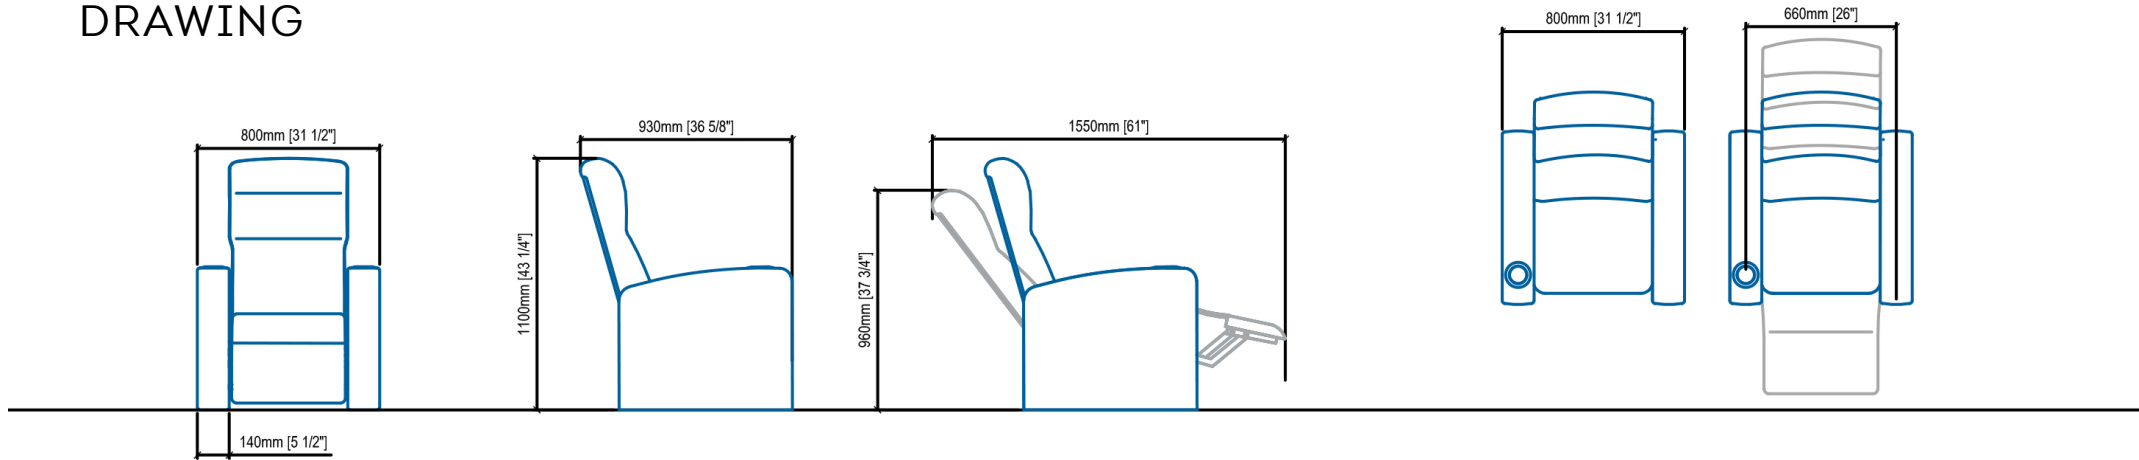


## OPTIONS



Embroidered logo



Row labels



Seating numbering

## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

	Fabrics	Fire Barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Parte 1		•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.