



FUSHION PLUS PL

TECHNICAL SPECIFICATIONS



Dimensions: 57 a 59 cm seat centres
53 cm depth
100 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.


Side panel: Texturized injected polypropylene, 70mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concealed floor fixation system.

Armrest: Rectangular texturized injected polypropylene.


Volume: 0.15 m³ / unit

Weight: 18 Kg not assembled

FUSHION PLUS PL

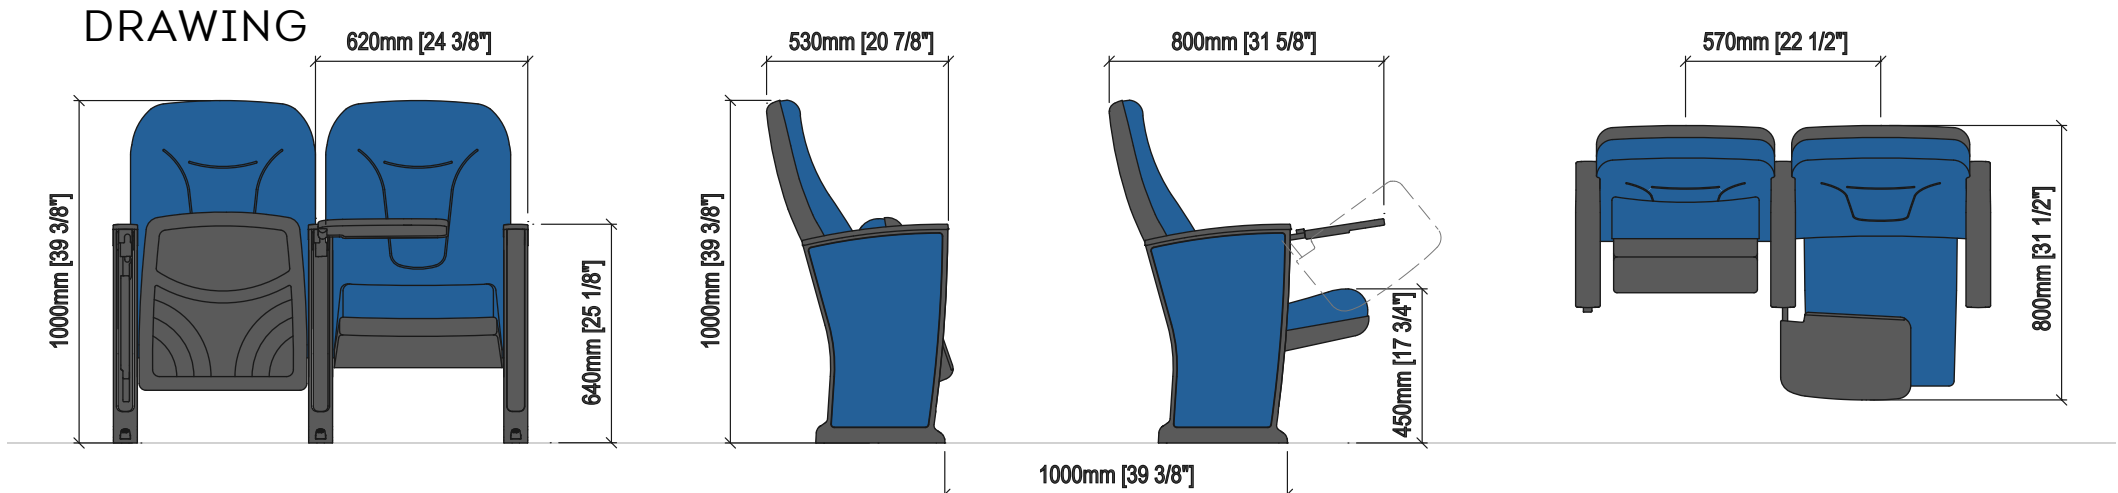

OPTIONS

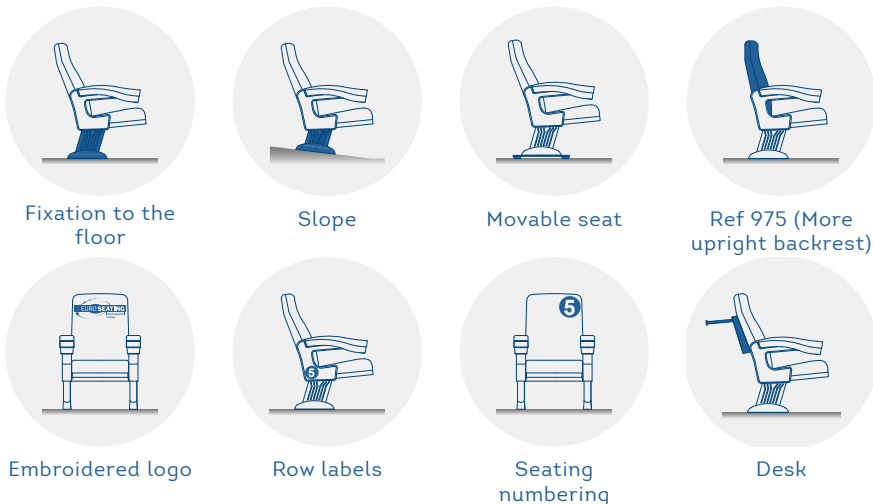

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

	Fabrics	Fire barrier	Mousse	Seat
BS 5852:2006	•			
BS-EN 1021-1:2006	•			
CAL TB 117-2013, SECTION 1	•			
UNE 23.727-90 1R (M1)	•	•		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•	•
BS 5852:1979 Parte 1		•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.