



TECHNICAL SPECIFICATIONS



Dimensions: 52-54 cm seat centres
55.5 cm depth
95.5 cm height

Backrest: Manufactured over a MDF board, bowed in roof tile-shaped, on which an open cell polyurethane foam block upholstered by means of a fabric cover is fixed. All this structure is protected by a wood covering and a perimeter frame in beech compressed wood.
Polyurethane density 40 Kg/m³.

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³.


Side panel: Fibres wood board, finish in beech. Internal steel structure. Concelaed floor fixation system.

Armrest: Round-shaped varnished solid wood.


Volume: 0.140 m³/unit

Weight: 19.50 Kg not assembled

DRAWING

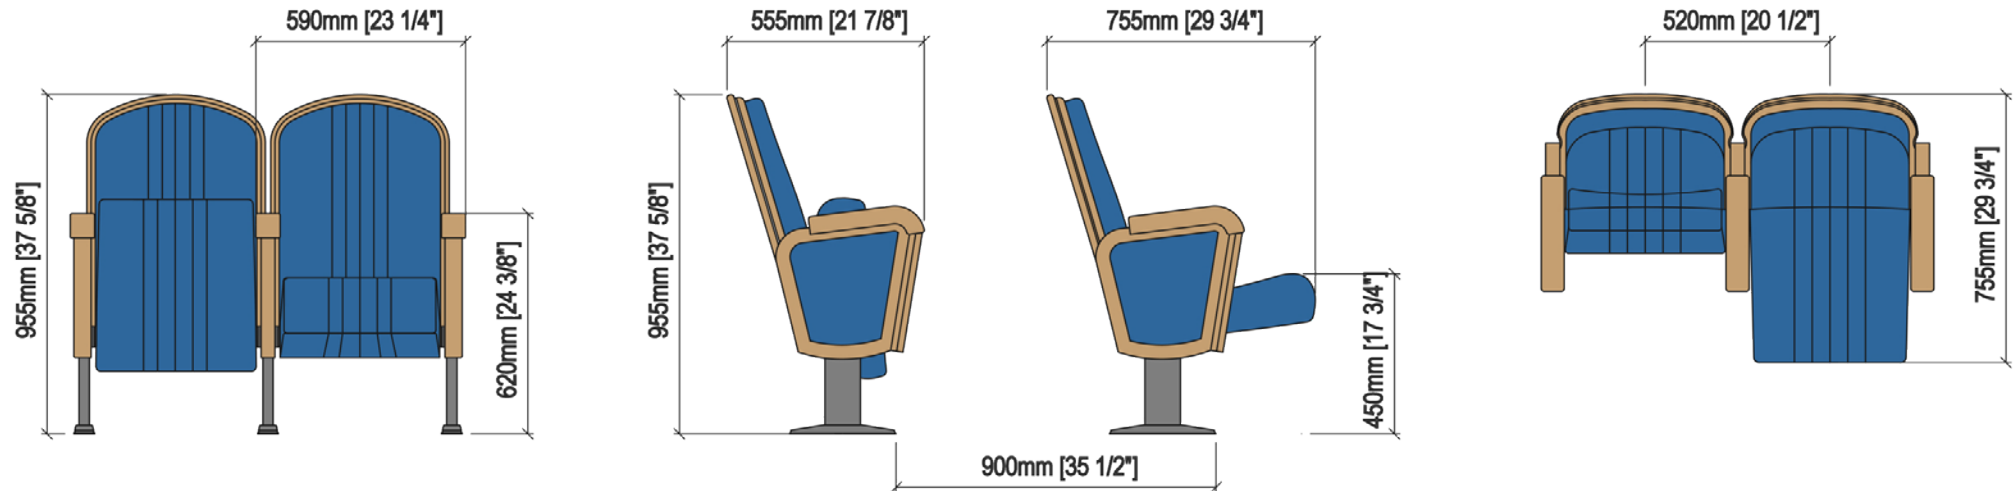

OPTIONS

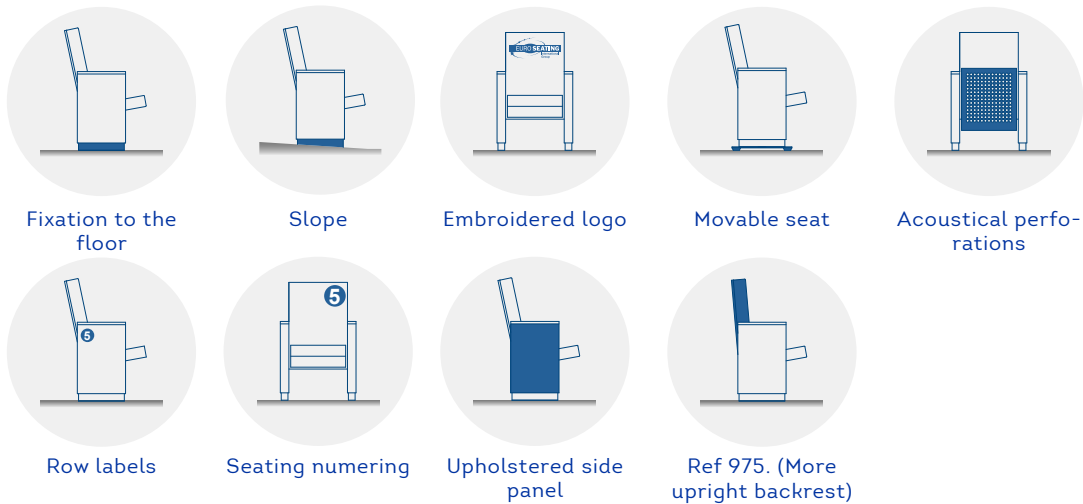

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

| Fabrics | Fire Barrier | Foam | Seat |
|---------|--------------|------|------|
| • | | | |
| • | | | |
| • | | | |
| • | • | | |
| • | • | • | • |
| | • | | |



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.