

## TECHNICAL SPECIFICATIONS



**Dimensions:** 59 - 61 cm seat centres  
60 cm depth  
111 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.


**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.

**Side panel:** Texturized injected polypropylene, 70mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concelaed floor fixation system.


**Armrest:** Rectangular texturized injected polypropylene.

**Volume:** 0.15 m<sup>3</sup> / unit

**Weight:** 21.20 Kg not assembled

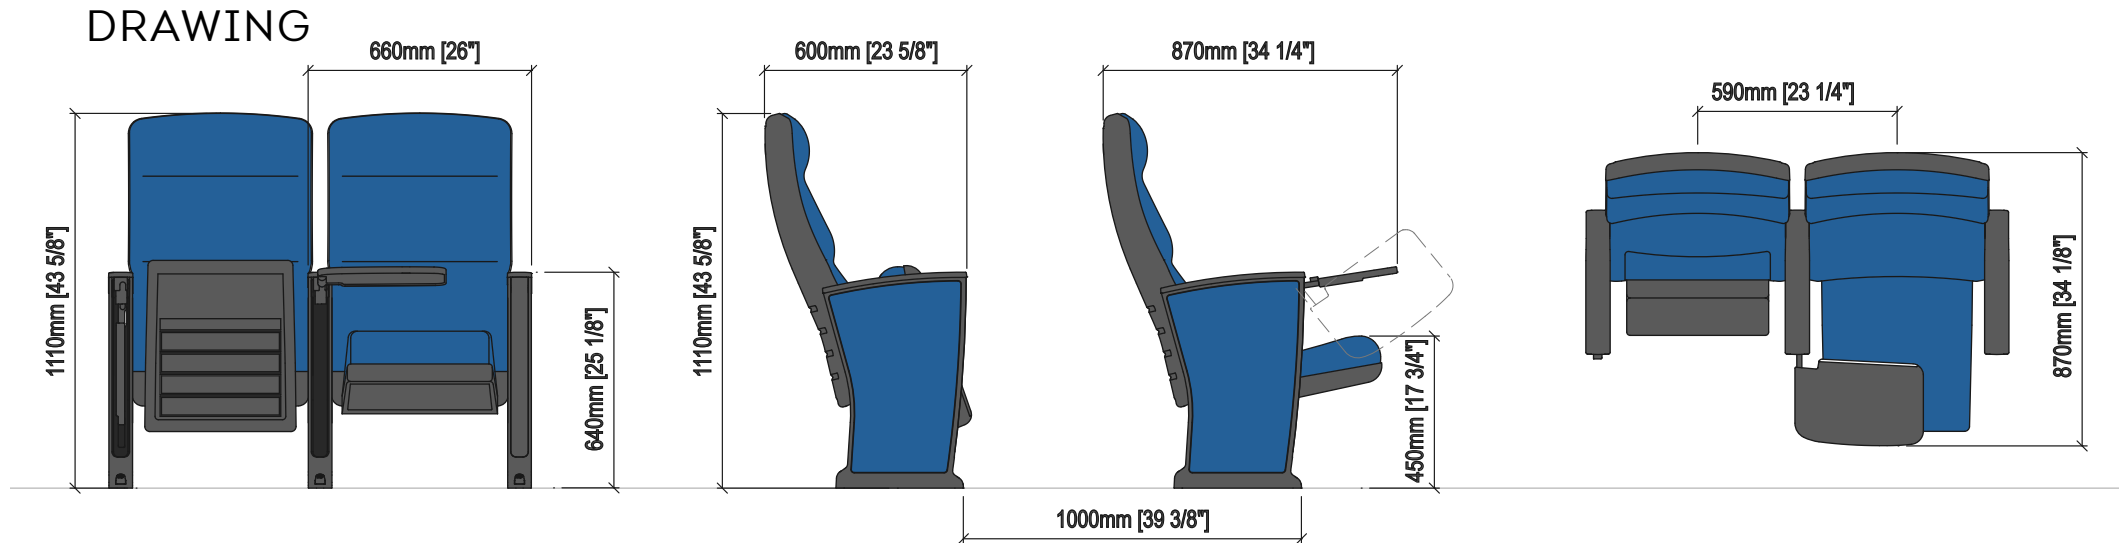

## OPTIONS

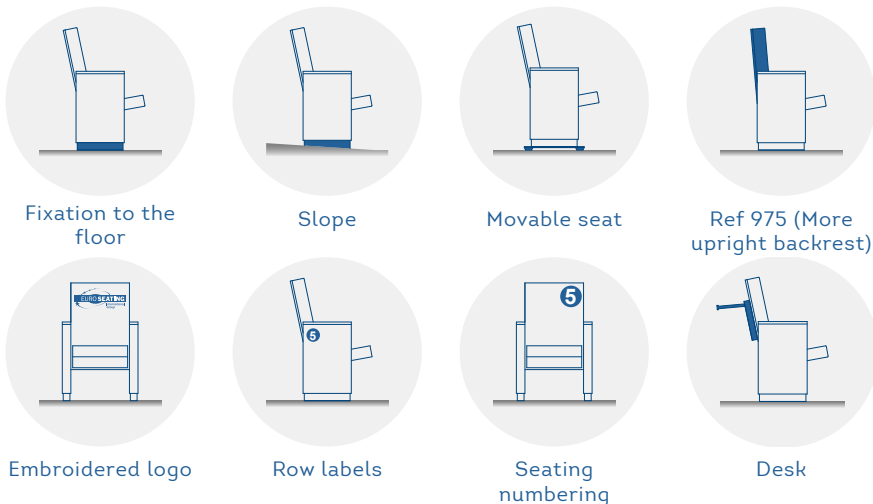

## CERTIFICATES

BS 5852:2006  
 BS-EN 1021-1:2006  
 CAL TB 117-2013, SECTION 1  
 UNE 23.727-90 1R (M1)  
 UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
 BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.