




TECHNICAL SPECIFICATIONS


- Dimensions:** 59 - 61 cm seat centres
60 cm depth
111 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. End row panels completely upholstered. Conceleaed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene.
- Volume:** 0.15 m³ / unit
- Weight:** 19.20 Kg not assembled

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

DRAWING

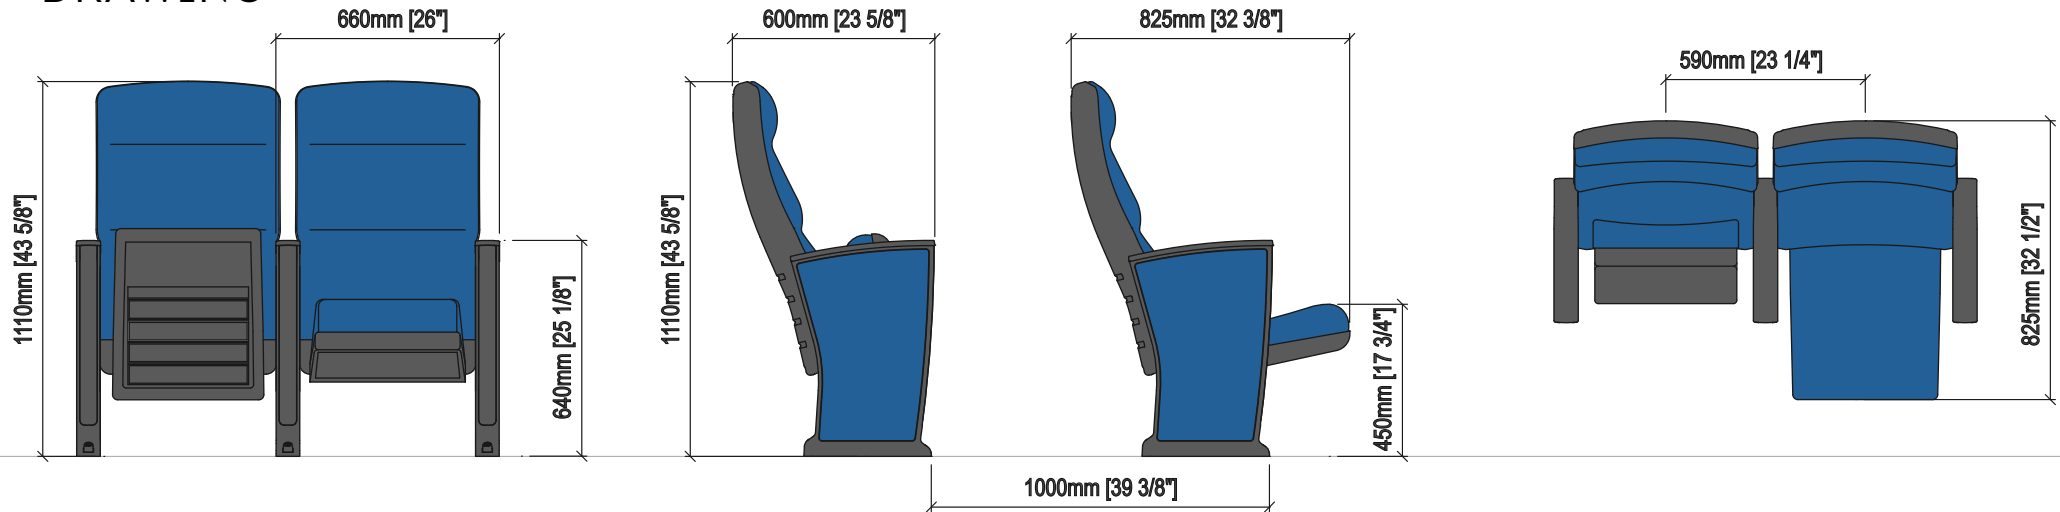

OPTIONS

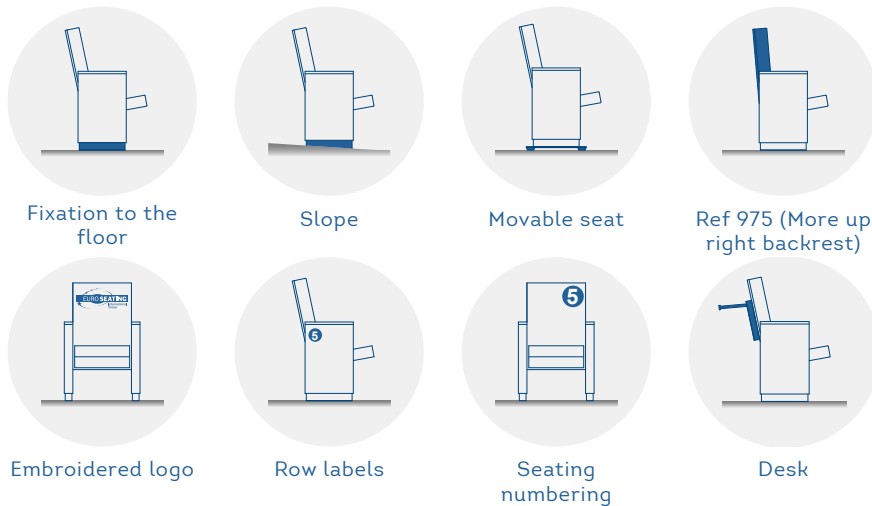

CERTIFICATES

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 1R (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

	Fabrics	Fire barrier	Foam	Seat
BS 5852:2006	•			
BS-EN 1021-1:2006	•			
CAL TB 117-2013, SECTION 1	•			
UNE 23.727-90 1R (M1)	•	•		
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•	•
BS 5852:1979 Parte 1		•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.