

# KING RECLINER R10




## TECHNICAL SPECIFICATIONS

### Recliner seat with motorized electric footrest.


- Dimensions:** 68 cm seat centres  
95 - 155 cm depth  
110 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Different options of backrest drawing. Polyurethane density 55 Kg/m<sup>3</sup>.
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. Polyurethane density 65 Kg/m<sup>3</sup>. Full reclining system: by pressing the button, the backrest reclines backwards and the footrest is raised to the customer choice. Individual electrical motor included.
- Side panel:** Wood structure completely upholstered. Concealed floor fixation system. Possibility of adding cupholder and table.
- Volume:** 0.210 m<sup>3</sup> / unit
- Weight:** 60 Kg

# KING RECLINER R10

## DRAWING

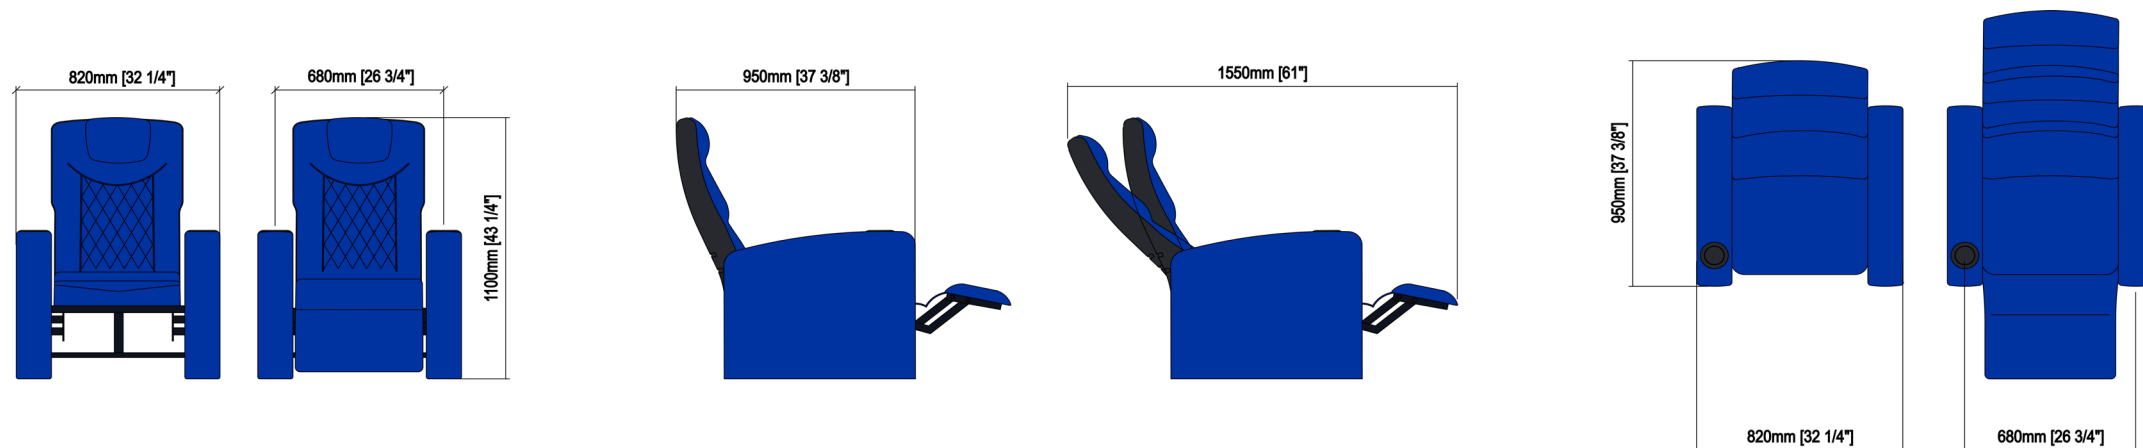


## OPTIONS



Embroidered logo



Row labels



Seating  
numbering

## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Part 1

Fabrics	Fire barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	