

TECHNICAL SPECIFICATIONS

Dimensions: 53 - 56 cm seat centres
45 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. Everything is protected by a varnished solid wood cover. Polyurethane density 55 Kg/m³

Seat: Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Wood fibres board, finish in beech. Concealed floor fixation system.


Armrest: Included in the very side panel.

Volume: 0.150 m³/unit

Weight: 22.65 Kg not assembled



DRAWING

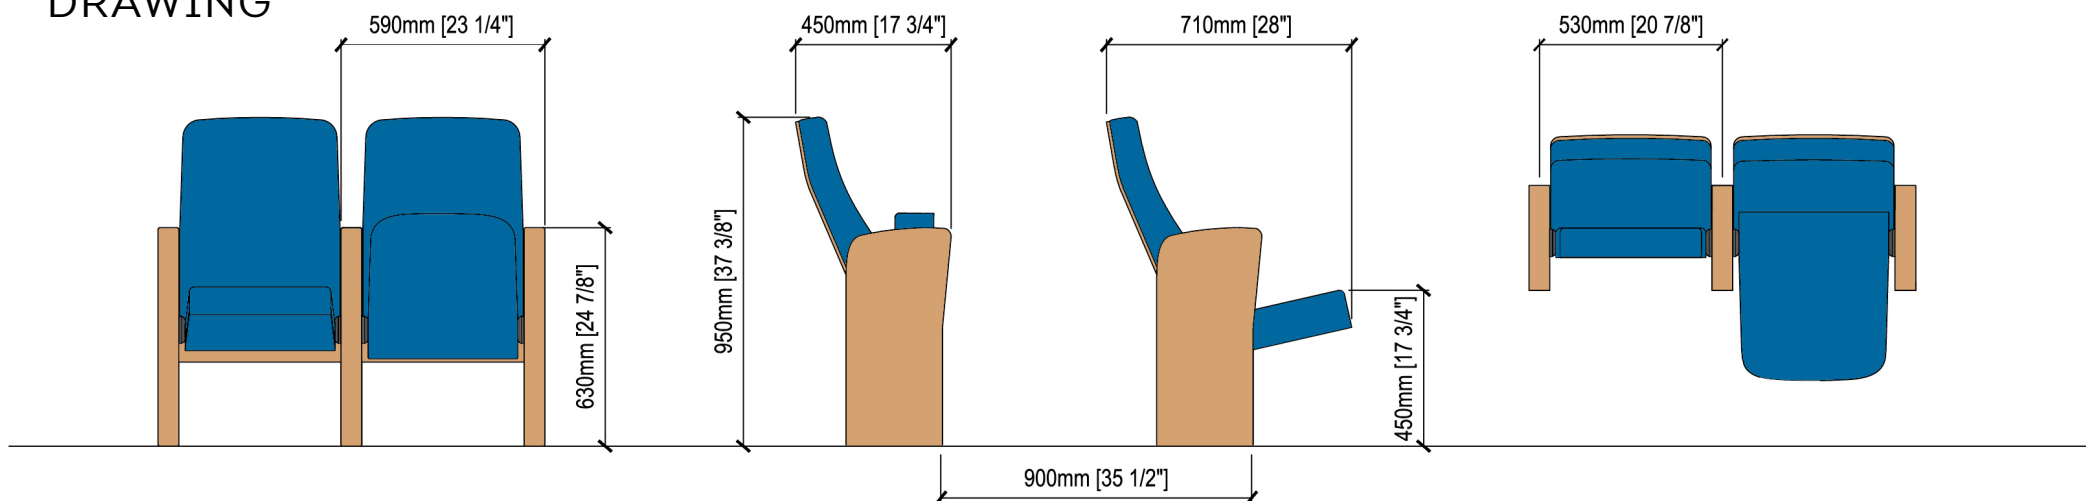

OPTIONS



CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		