

## TECHNICAL SPECIFICATIONS



**Dimensions:** 54-56 cm seat centres  
49 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.


**Side panel:** Extrusion blow moulded in texturized high-density polyethylene, 60mm. End row panels completely upholstered. Concealed floor fixation system.

**Armrest:** Optionally in wood


**Volume:** 0.160 m<sup>3</sup> por unidad

**Weight:** 17.80 Kg desmontada

**DRAWING**

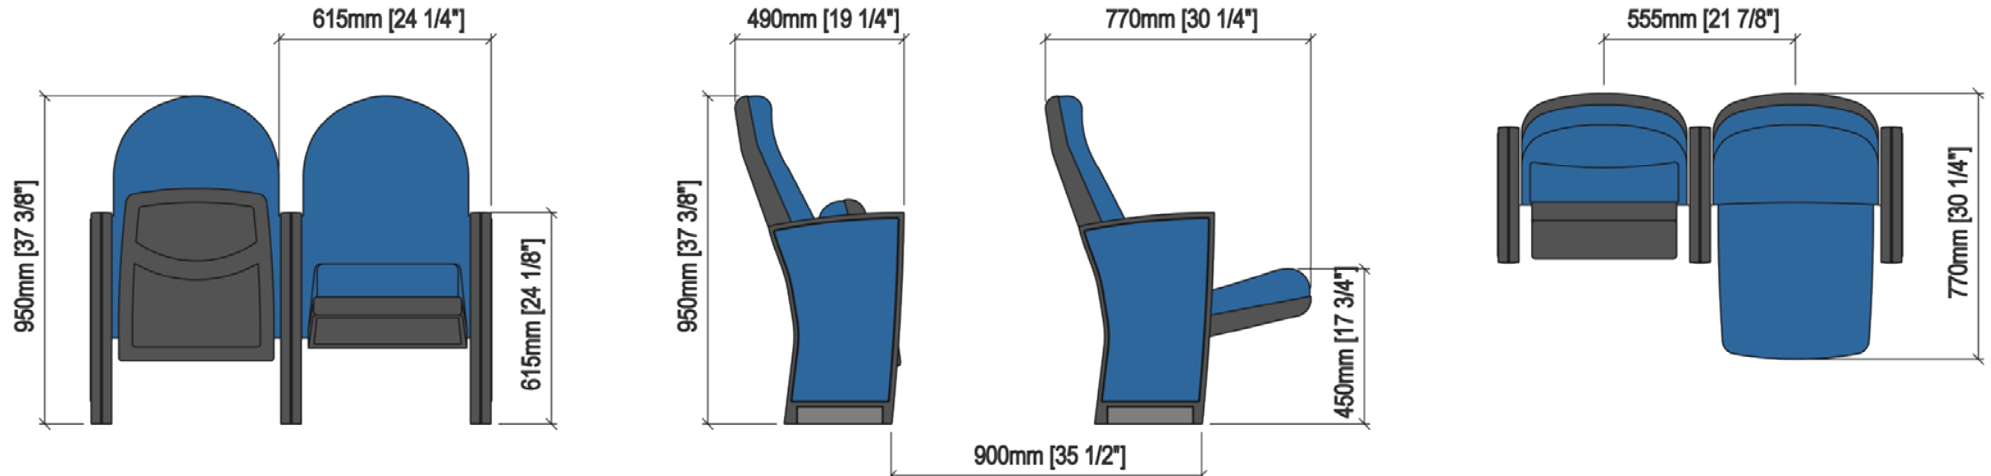

**OPCIONES**

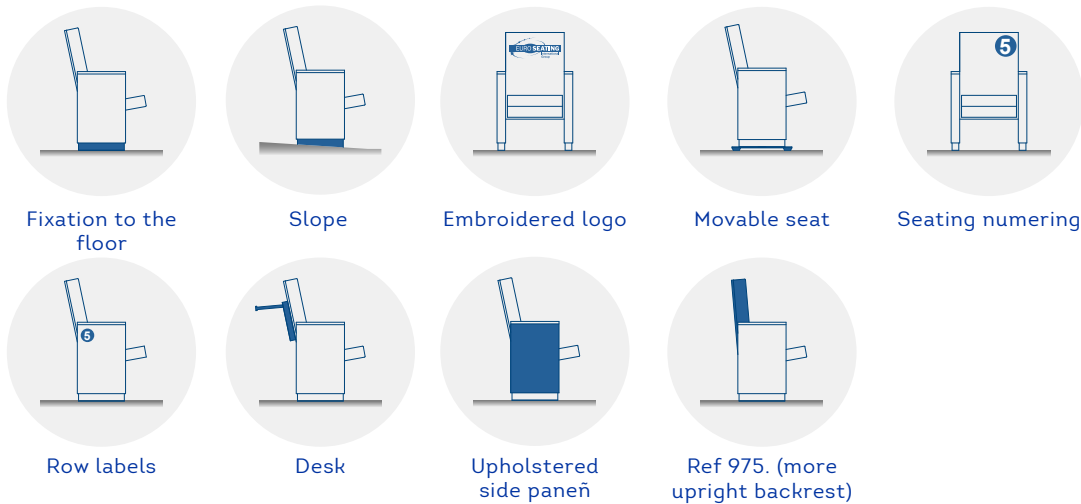

**CERTIFICATES**

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam
•		
•		
•	•	
•	•	•
	•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.