

## TECHNICAL SPECIFICATIONS



**Dimensions:** 52-55 cm seat centres  
40 cm depth  
122 cm height

**Backrest:** Extrusion blow moulded in texturized high-density polyethylene. Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover. It fits into the lateral parts of the side panel. Foam density, 40 Kg/m<sup>3</sup>

**Seat:** Extrusion blow moulded in texturized high-density polyethylene. Structure fixed over an open cell polyurethane foam block upholstered by means of a fabric cover. The folding takes places automatically under gravity. Foam density, 40 Kg/m<sup>3</sup>.

**Side panel:** Texturized injected polypropylene, reinforced with glass fibre. Conceleaed floor fixation system.


**Armrest:** Included in the very side panel.

**Volume:** 0.09 m<sup>3</sup>/unit


**Weight:** 12.50 Kg not assembled

# MAXY PAD

## DRAWING

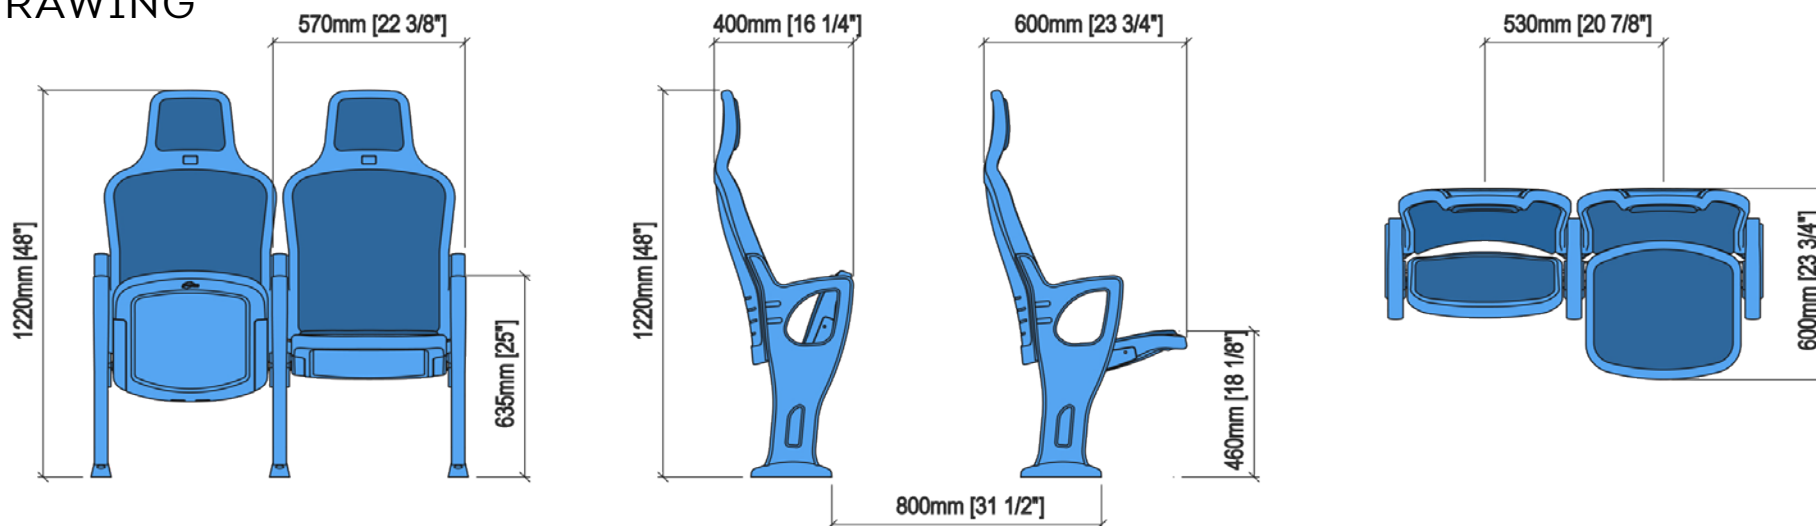

## OPTIONS

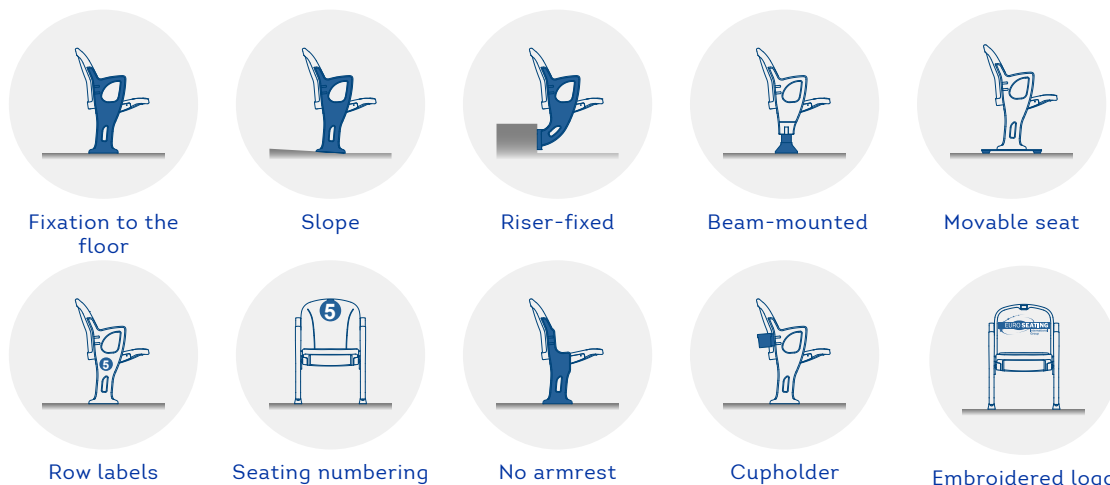

## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1  
UNE 23.727-90 1R (M2 / M3) Opcional

Fabrics	Fire Barrier	Foam	Plastic
•			
•			
•			
•	•		
•	•	•	
	•		
			•

**AIDIMA**  
INSTITUTO TECNOLÓGICO  
MUEBLE, MADERA, EMBALAJE Y VINOS

**ffmo**  
FEDERATION OF FURNITURE  
MANUFACTURERS OF EUROPE



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.