

MONTREAL PL

TECHNICAL SPECIFICATIONS



Dimensions: 54-56 cm seat centres
54 cm depth
100 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.

Side panel: Texturized injected polypropylene, 60mm. Anti - panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concealed floor fixation system.


Armrest: Rounded texturized injected polypropylene.

Volume: 0.170 m³/unit


Weight: 19.30 Kg not assembled

MONTREAL PL

DRAWING

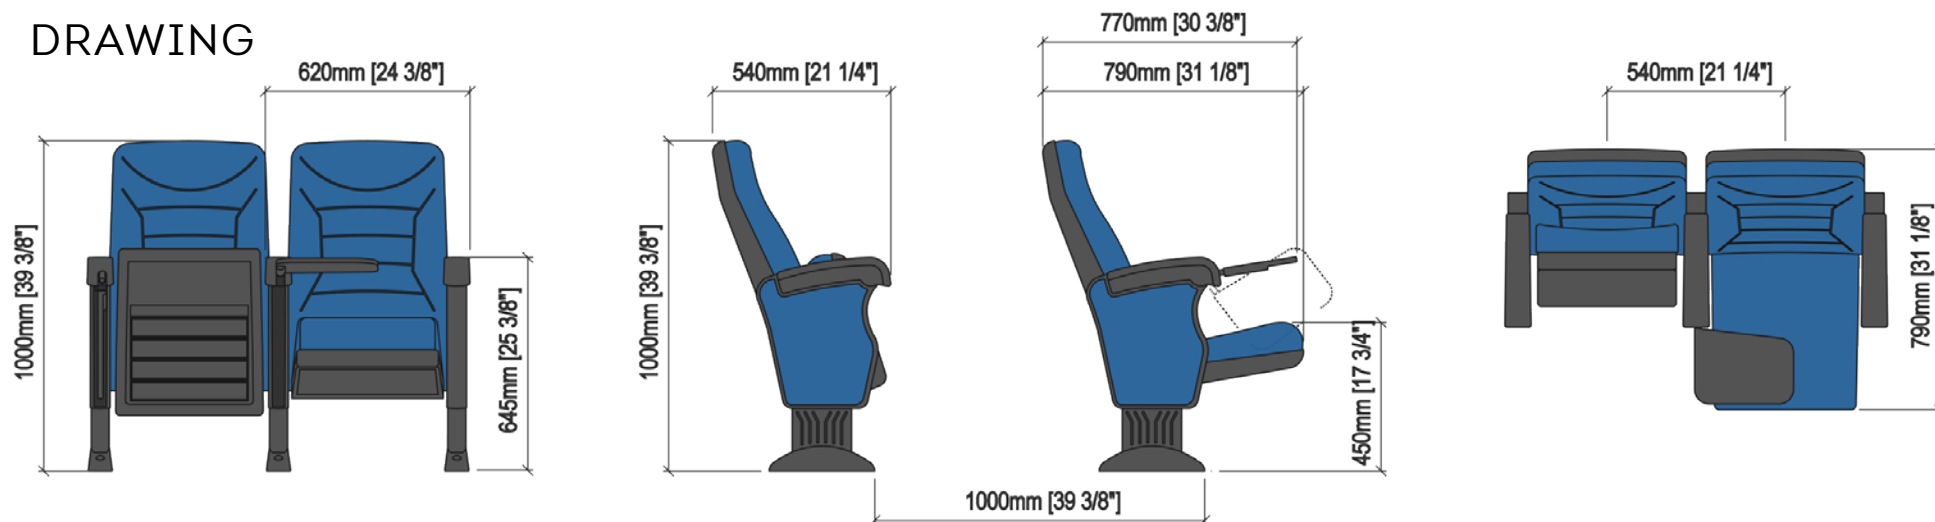

OPTIONS

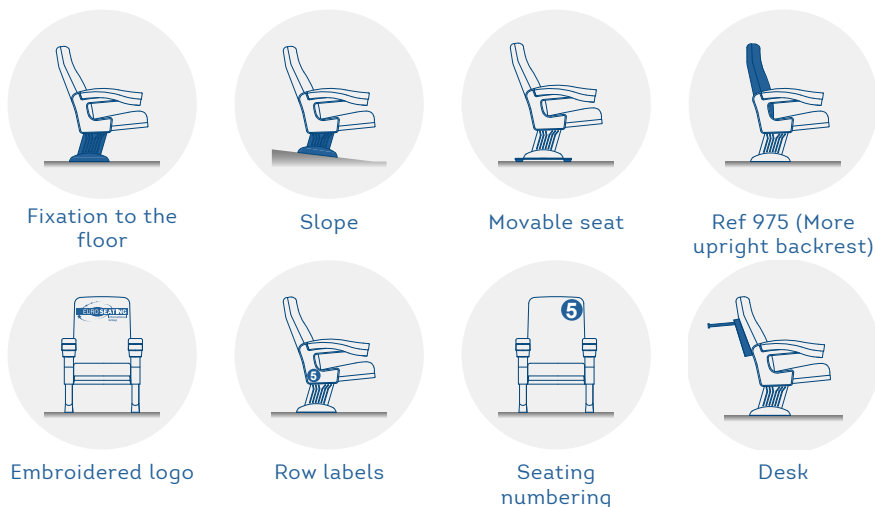

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

ffmo
FEDERATION OF FURNITURE MANUFACTURERS OF EUROPE



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.