



TECHNICAL SPECIFICATIONS

Dimensions: 52-54 cm seat centres
56.5 cm depth
95 cm height

Backrest: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover and everything is protected by a varnished solid wood cover.
Polyurethane density 55 Kg/m³.

Seat: Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³

Side panel: ITexturized injected polypropylene, 40mm. End row panels completely upholstered. Concealed floor fixation system.


Armrest: Round-shaped varnished solid wood.

Volume: 0.110 m³/unit


Weight: 16.50 Kg not assembled



DRAWING

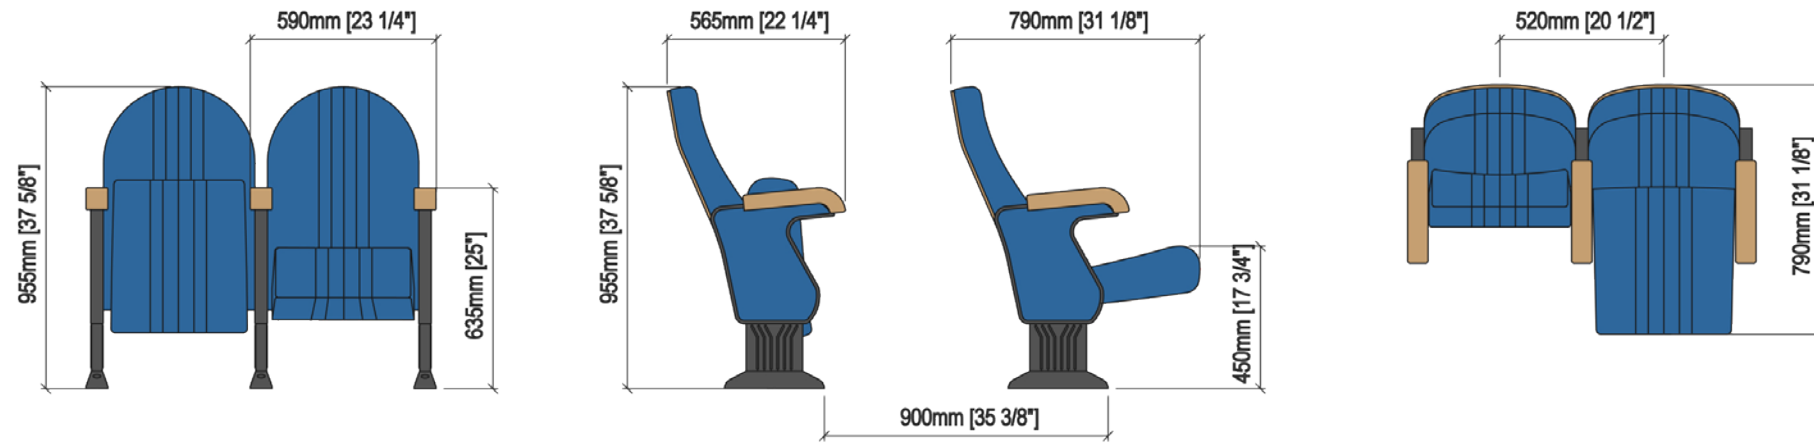

OPTIONS

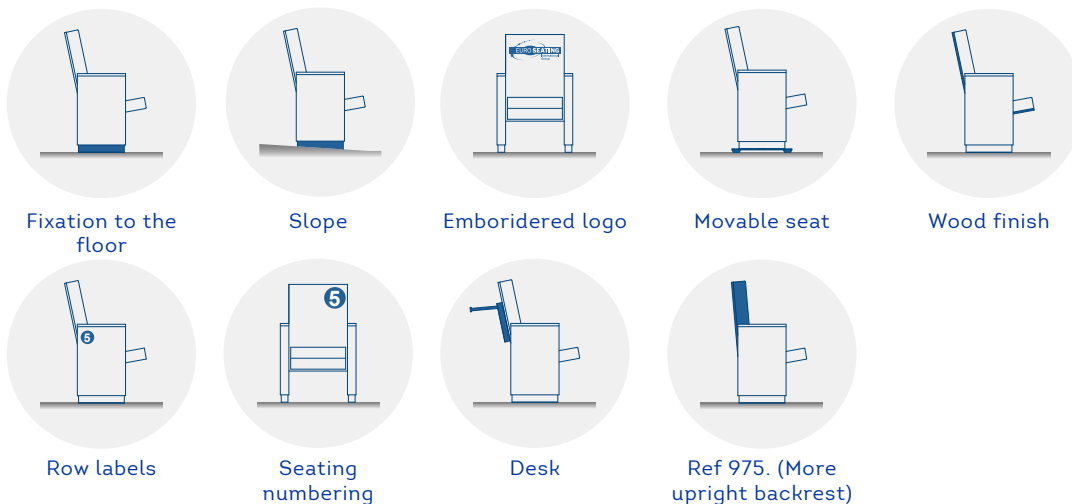

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
COEFICIENTE DE ABSORCIÓN ACÚSTICA
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	
			•
	•		