




TECHNICAL SPECIFICATIONS




- Dimensions:** 54-56 cm seat centres
54.5 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover and everything is protected by a varnished solid wood cover.
Polyurethane density 55 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring.
Polyurethane density 65 Kg/m³
- Side panel:** Texturized injected polypropylene, 60mm Anti-panic polystyrene writing pad system with interior steel structure, located in the interior of the side panel. End row panels completely upholstered. Concealed floor fixation system.
- Armrest:** Round-shaped varnished solid wood.
- Volume:** 0.130 m³/unit
- Weight:** 17.90 Kg not assembled

DRAWING

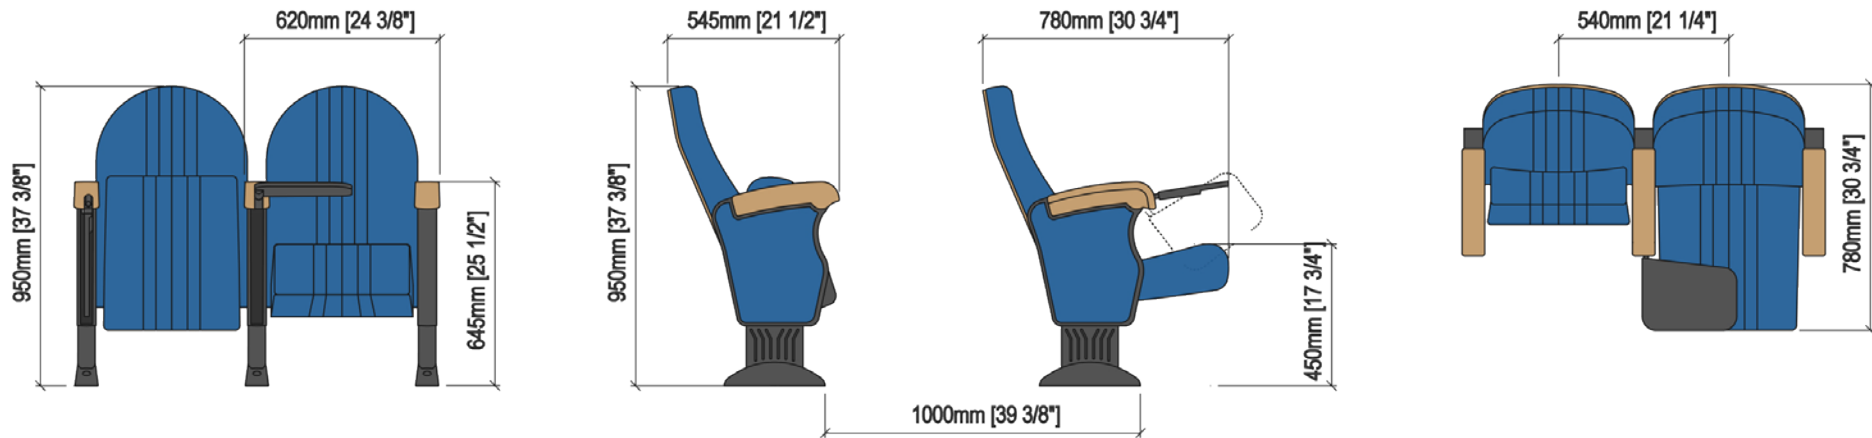

OPTIONS

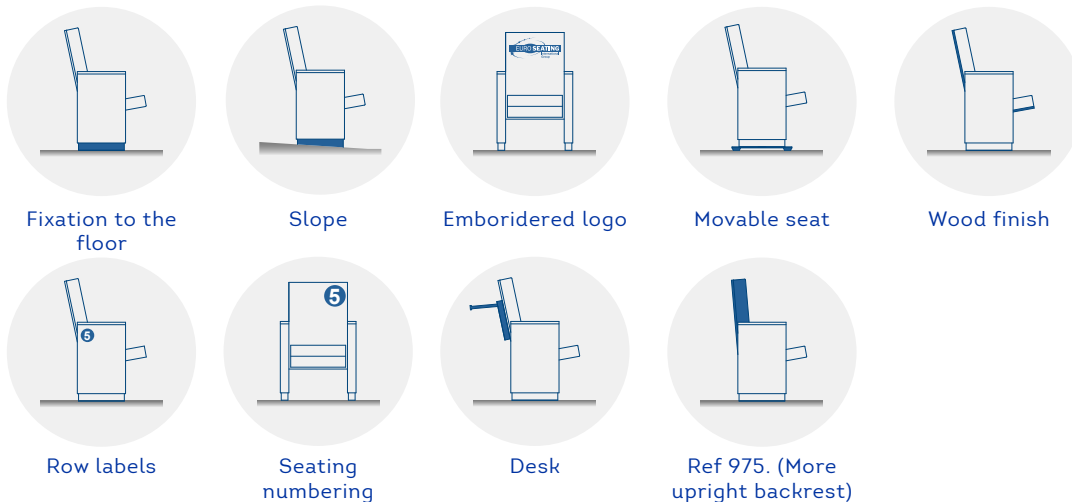

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

Acoustic absorption

BS 5852:1979 Parte 1

Fabrics Fire Barrier Foam Seat

•			
•			
•			
•	•		
•	•	•	
			•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLES, MADRES, EMBALAJE Y VITRINE

ffmo



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.