




TECHNICAL SPECIFICATIONS

Dimensions:	55 - 57 cm seat centres 52.5 cm depth 95 cm height
Backrest:	Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by a compressed wood cover. Polyurethane density 55 Kg/m ³ .
Seat:	Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m ³ .
Side panel:	Texturized injected polypropylene, 70mm. End row panels by laminated 3D finish with LYF system. Optional end row panels fully upholstered or by wood. Concealed floor fixation system.
Armrest:	Rectangular texturized injected polypropylene, finished by LYF System. Optional in polypropylene or by wood.
Volume:	0.150 m ³ /unit
Weight:	19.7 Kg not assembled

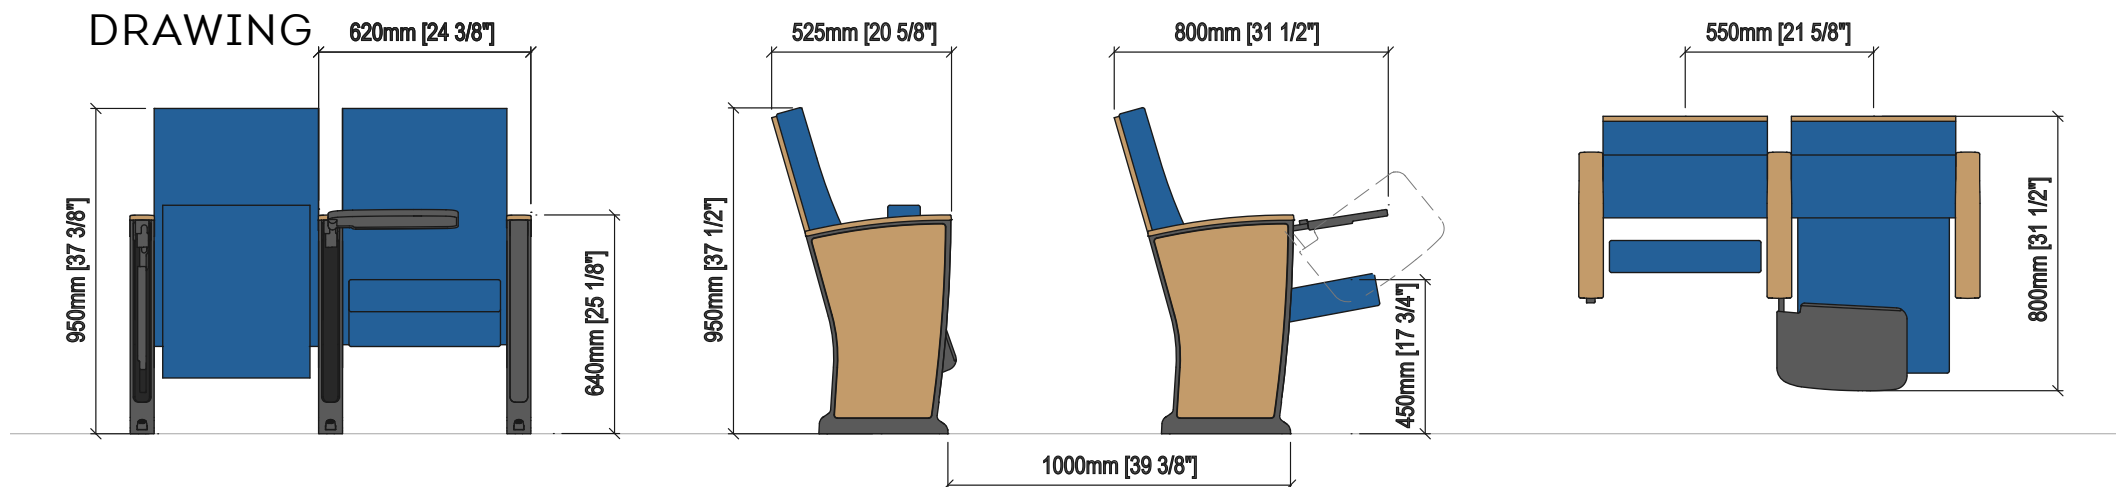

OPTIONS



CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 IR (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

fmo
FEDERATION OF
MODULAR OFFICE
FURNITURE

FIRA
FEDERATION OF
INTERNATIONAL
RESEARCH ASSOCIATION

BUREAU VERITAS
Certification

BUREAU VERITAS
Certification

AENOR
Ecodiseño
UNE-EN ISO 14006

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.