



## TECHNICAL SPECIFICATIONS



**Dimensions:** 55 - 57 cm seat centres  
52 cm depth  
95 cm height

**Backrest:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system. Polyurethane density 55 Kg/m<sup>3</sup>.

**Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.


**Side panel:** Texturized injected polypropylene, 70mm. End row panels completely upholstered. Optional by LYF system or wood. Concealed floor fixation system.

**Armrest:** Rectangular texturized injected polypropylene by laminated 3D finish with LYF system. Optional by injected polypropylene or wood.

**Volume:** 0.15 m<sup>3</sup>

**Weight:** 17.50 Kg not assembled

**DRAWING**

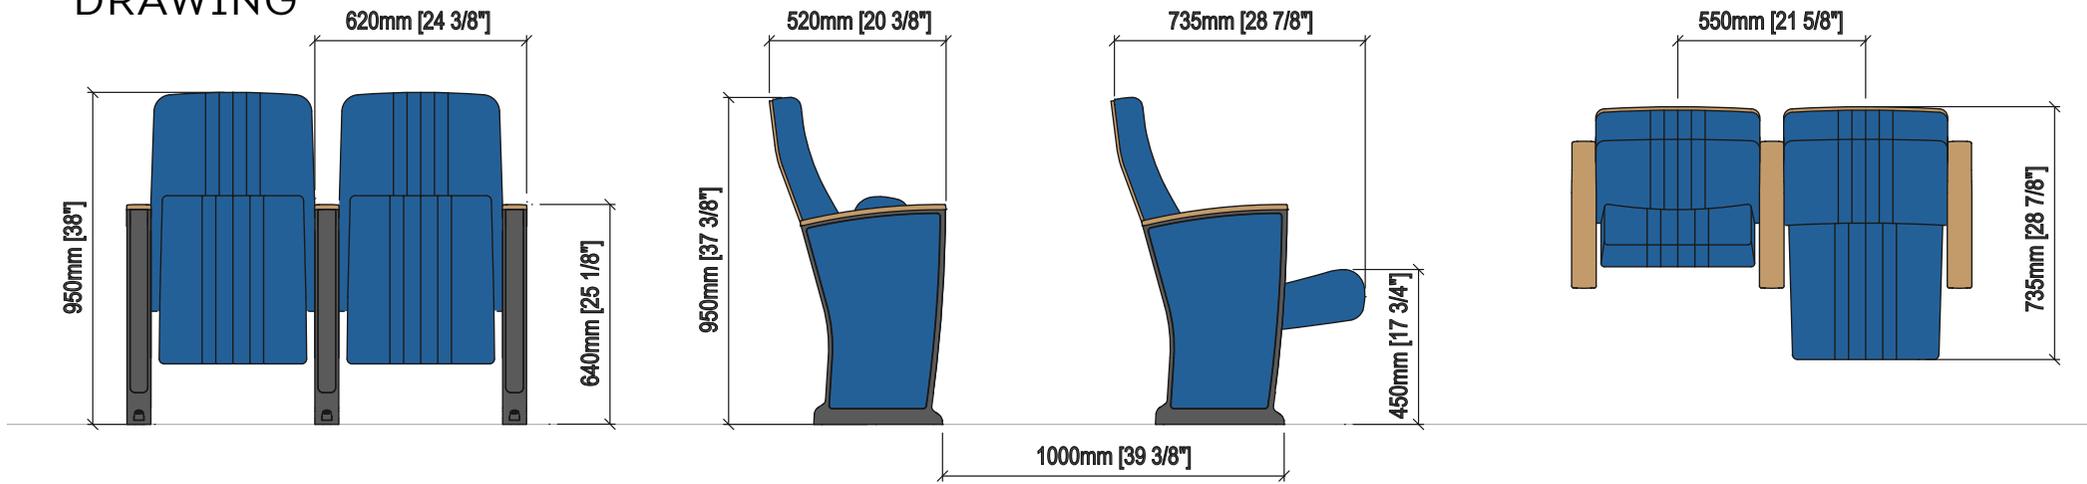

**OPTIONS**



**CERTIFICATES**

- BS 5852:2006
- BS-EN 1021-1:2006
- CAL TB 117-2013, SECTION 1
- UNE 23.727-90 IR (M1)
- UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
- BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.