



**EURO
SEATING**

No limits to inspiration

www.euroseating.com

ROMA COMFORT V11 H

TECHNICAL SPECIFICATIONS




- Dimensions:** 58-63 cm seat centres
78.5 cm depth
100 + 11 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Optional headrest 'H' with seat shell. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 80mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder, completely upholstered.
- Volume:** 0.210 m³/unit
- Weight:** 20.30 Kg not assembled


Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.

ROMA COMFORT V11 H

DRAWING

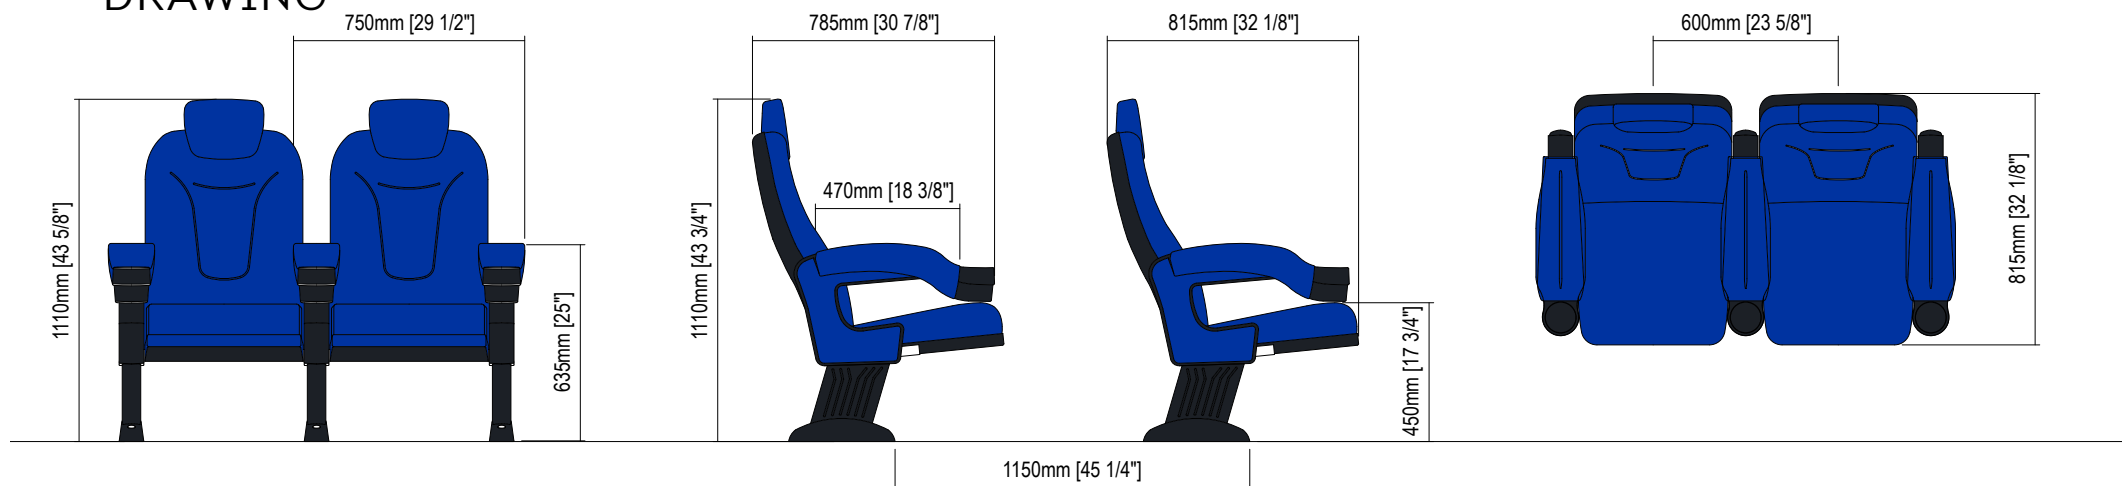

OPTIONS

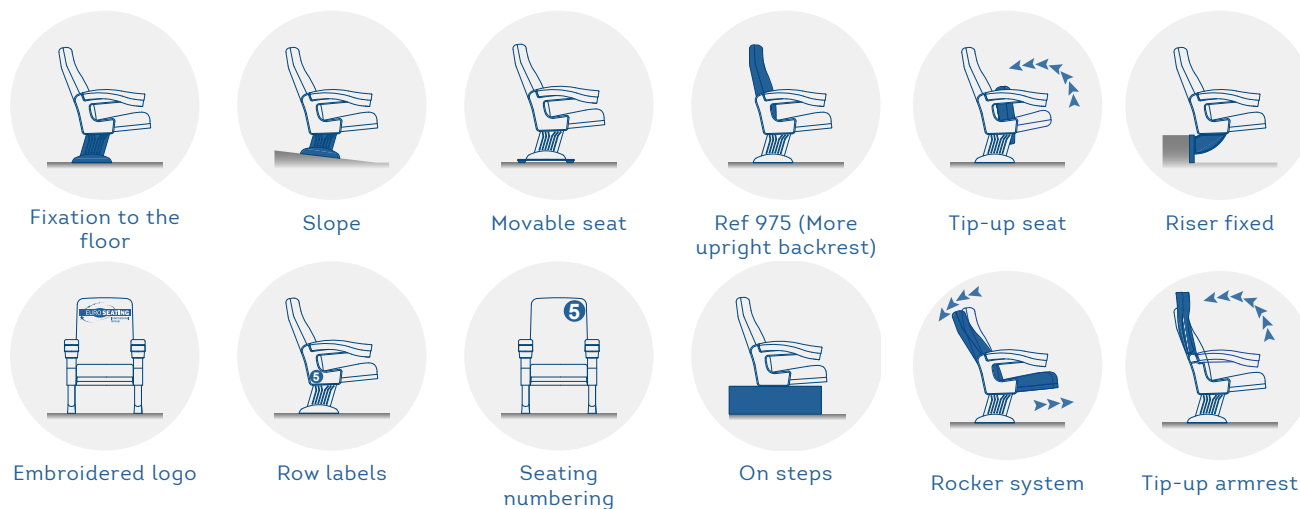

CERTIFICATES

	Fabrics	Fire Barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Parte 1		•	