

# ROMA COMFORT

## TECHNICAL SPECIFICATIONS

**Dimensions:** 58 - 60 cm seat centres  
61 cm depth  
100 + 15 cm height

**Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Optional headrest with seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.

**Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m<sup>3</sup>.

**Side panel:** Texturized injected polypropylene, 80mm  
End row panels completely upholstered.  
Concealed floor fixation system.

**Armrest:** Straight-shaped texturized injected polypropylene.


**Volume:** 0.210 m<sup>3</sup>/unit

**Weight:** 19.60 Kg not assembled



# ROMA COMFORT

## DRAWING

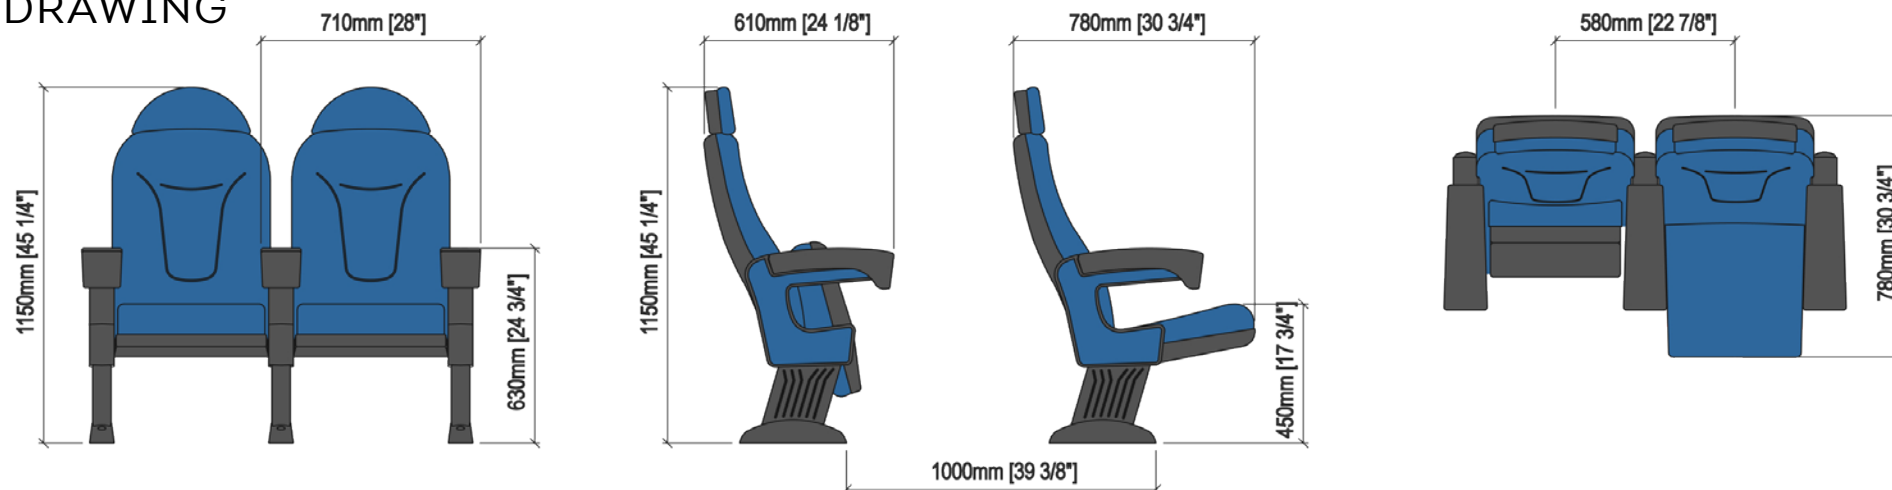

## OPTIONS



## CERTIFICATES

BS 5852:2006  
BS-EN 1021-1:2006  
CAL TB 117-2013, SECTION 1  
UNE 23.727-90 1R (M1)  
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006  
BS 5852:1979 Parte 1

Fabrics	Fire Barrier	Espuma
•		
•		
•		
•	•	
•	•	•
	•	

**AIDIMA**  
INSTITUTO TECNOLÓGICO  
MUEBLE, MADERA, EMBALAJE Y VINOS

**ffmo**  
FEDERATION OF FURNITURE  
MANUFACTURERS OF EUROPE



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.