

ROMA COMFORT V07


TECHNICAL SPECIFICATIONS

- Dimensions:** 57-63 cm seat centres
81 cm depth
100 + 15 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Optional headrest with seat shell. Polyurethane density 55 Kg/m³.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 80mm
End row panels completely upholstered.
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder.
- Volume:** 0.21 m³/unit
- Weight:** 20.10 not assembled



ROMA COMFORT V07

DRAWING

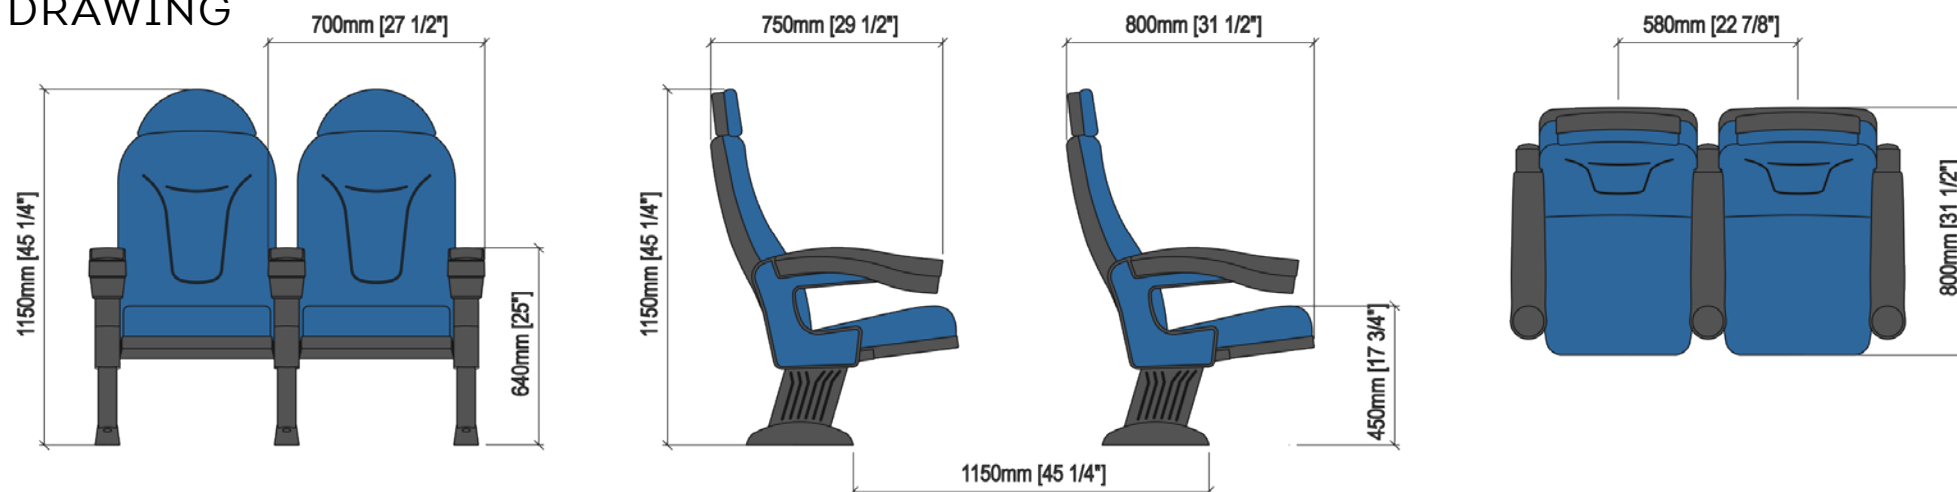

OPTIONS



Fixation to the floor



Slope



Movable seat



Ref 975 (More upright backrest)



Tip-up seat



Riser-fixed



Embroidered logo



Row labels



Seating numbering



On steps



Tip-up armrest



Rocker system

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 1R (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabrics	Fire barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	



Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.