


## TECHNICAL SPECIFICATIONS

- Dimensions:** 55-58 cm seat centres  
73.5 cm depth  
100 + 15 cm height
- Backrest:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Polyurethane density 55 Kg/m<sup>3</sup>.
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which wraps an injected polypropylene frame completely. All this structure is protected by a texturized injected polypropylene seat shell. Fixed in open position, anchored to the side panel by means of steel plates. Polyurethane density 65 Kg/m<sup>3</sup>.
- Side panel:** Texturized injected polypropylene, 40mm  
End row panels completely upholstered.  
Concealed floor fixation system.
- Armrest:** Texturized injected polypropylene, including integrated cupholder.
- Volume:** 0.180 m<sup>3</sup>/unit
- Weight:** 18.20 Kg not assembled



## DRAWING

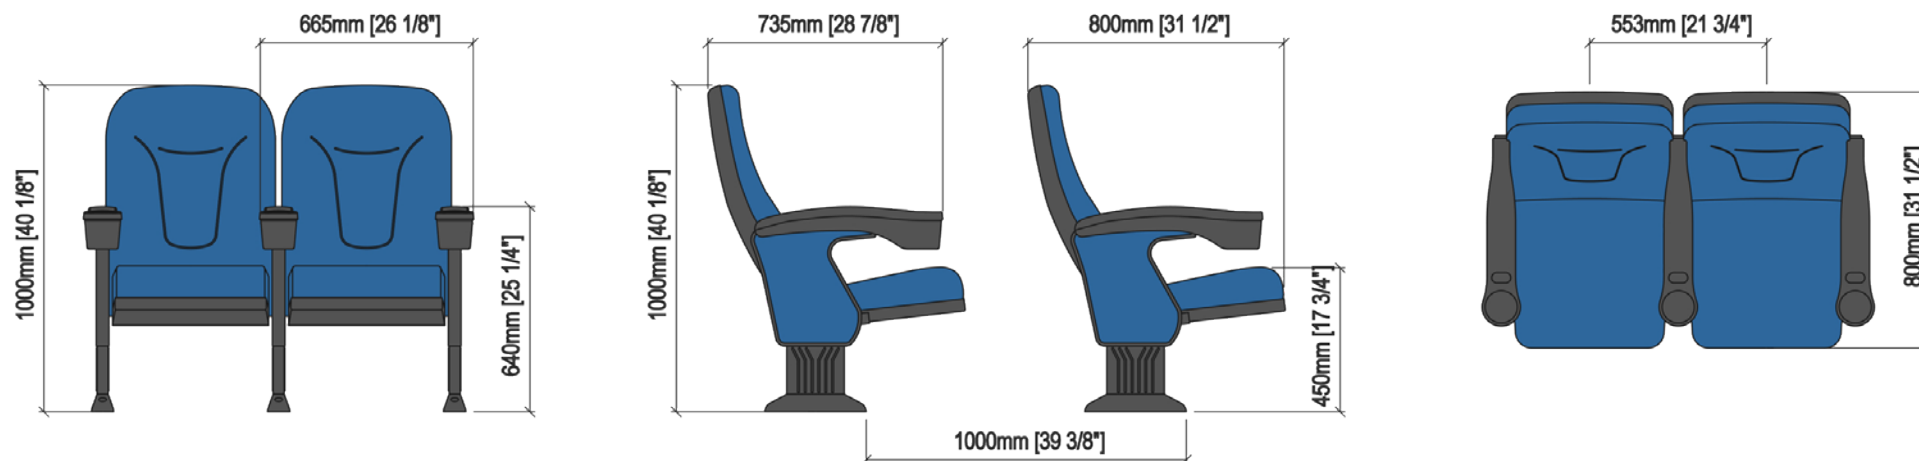

## OPTIONS



## CERTIFICATES

	Fabrics	Fire barrier	Foam
BS 5852:2006	•		
BS-EN 1021-1:2006	•		
CAL TB 117-2013, SECTION 1	•		
UNE 23.727-90 1R (M1)	•	•	
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006	•	•	•
BS 5852:1979 Parte 1		•	