


TECHNICAL SPECIFICATIONS




- Dimensions:** 57 - 59 cm seat centres
52,5 cm depth
95 cm height
- Backrest:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover, everything is protected by laminated 3D finish with LYF system or wood. Foam density, 40 Kg/m³.
- Seat:** Cold moulded polyurethane foam, which wraps an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. The seat pan folds by means of an automatic noiseless maintenance-free double spring. Polyurethane density 65 Kg/m³.
- Side panel:** Texturized injected polypropylene, 70mm. End row panels by laminated 3D finish with LYF system. Optional by wood or fully upholstered. Concealed floor fixation system.
- Armrest:** Rectangular texturized injected polypropylene. Optional; by LYF System or wood.
- Volume:** 0.150 m³/unit
- Weight:** 19,7 Kg not assembled

DRAWING

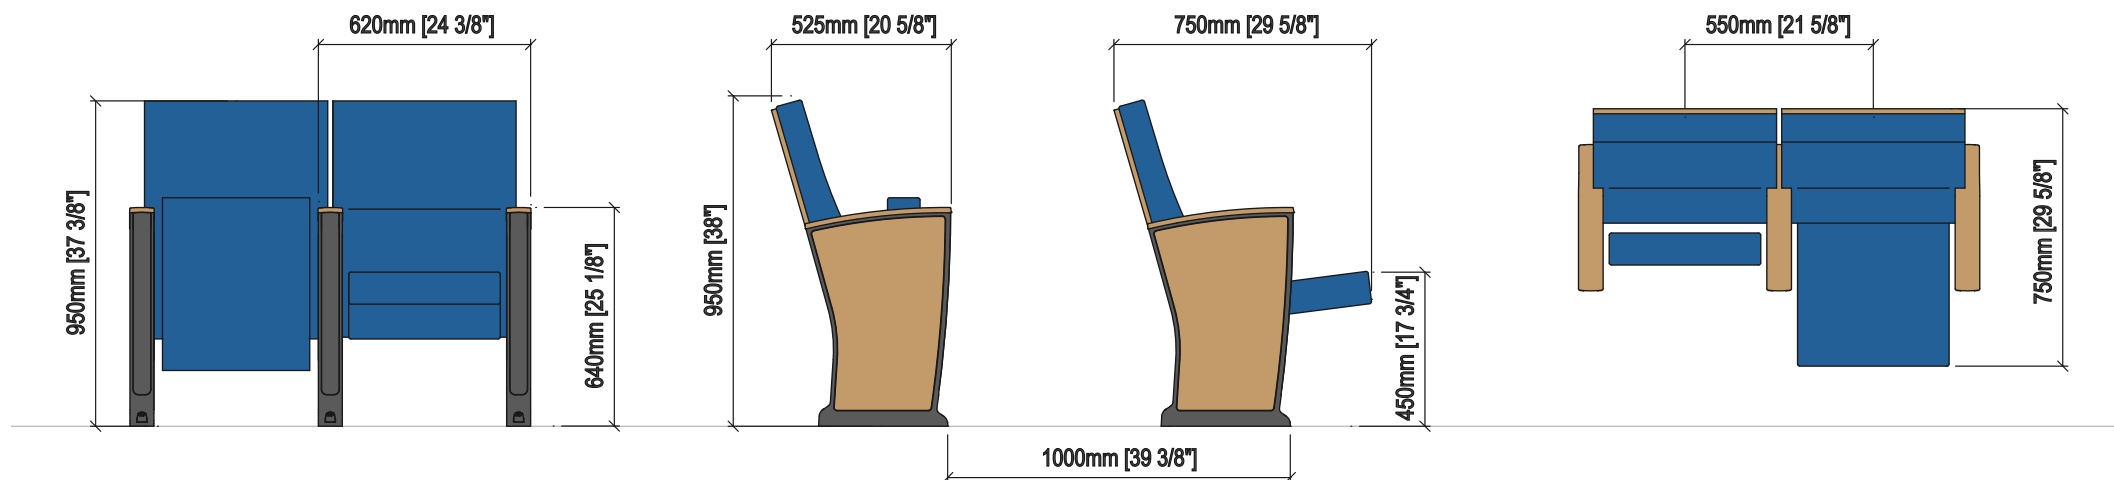

OPTIONS

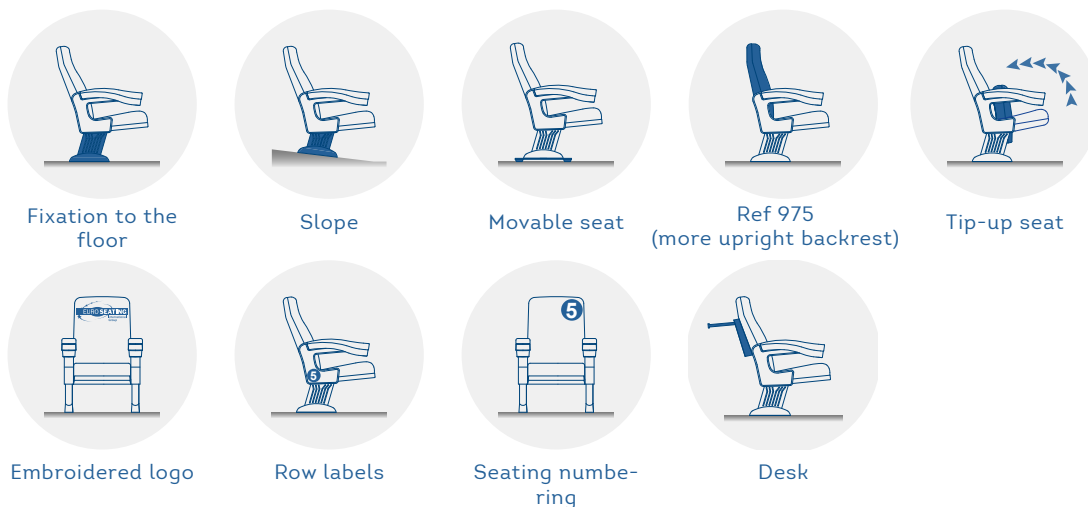

CERTIFICATES

BS 5852:2006

BS-EN 1021-1:2006

CAL TB 117-2013, SECTION 1

UNE 23.727-90 IR (M1)

UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006

BS 5852:1979 Parte 1

Fabric	Fire barrier	Foam	Seat
•			
•			
•			
•	•		
•	•	•	•
	•		

AIDIMA
INSTITUTO TECNOLÓGICO
MUEBLE, MADERA, EMBALAJE Y VINOS

fmo
FURNITURE MARKING ORGANIZATION

FIRA
FURNITURE INDUSTRY ASSOCIATION

BUREAU VERITAS
ISO 9001
Certification

BUREAU VERITAS
ISO 14001
Certification

AENOR
Ecodiseño
UNE-EN ISO 14006

Euro Seating reserves the right to modify the dimensions and characteristics without prior notice. All dimensions and specifications are given for information purposes only.