





TECHNICAL SPECIFICATIONS

- Dimensions:** 60 - 62 cm seat centres
84 cm depth
110 cm height
- Backrest:** Completely upholstered by means of a fabric cover, made up of an open cell polyurethane foam block and a beech solid wood frame with thin canvas strips. All this structure is protected by an upholstered wood cover.
Foam density, 40 Kg/m³
- Seat:** Cold moulded polyurethane foam 'UNIBLOCK 2' system, which enfolds an injected polypropylene frame completely. It is later upholstered by means of a fabric cover. Fixed in open position, anchored to the side panel by means of steel plates.
Polyurethane density 65 Kg/m³
- Side panel:** Wood structure completely upholstered. Concealed floor fixation system.
- Armrest:** Integrated into the side panel, fully upholstered.
- Volume:** 0.21 m³ / unit
- Weight:** 22.00 Kg not assembled

DRAWING

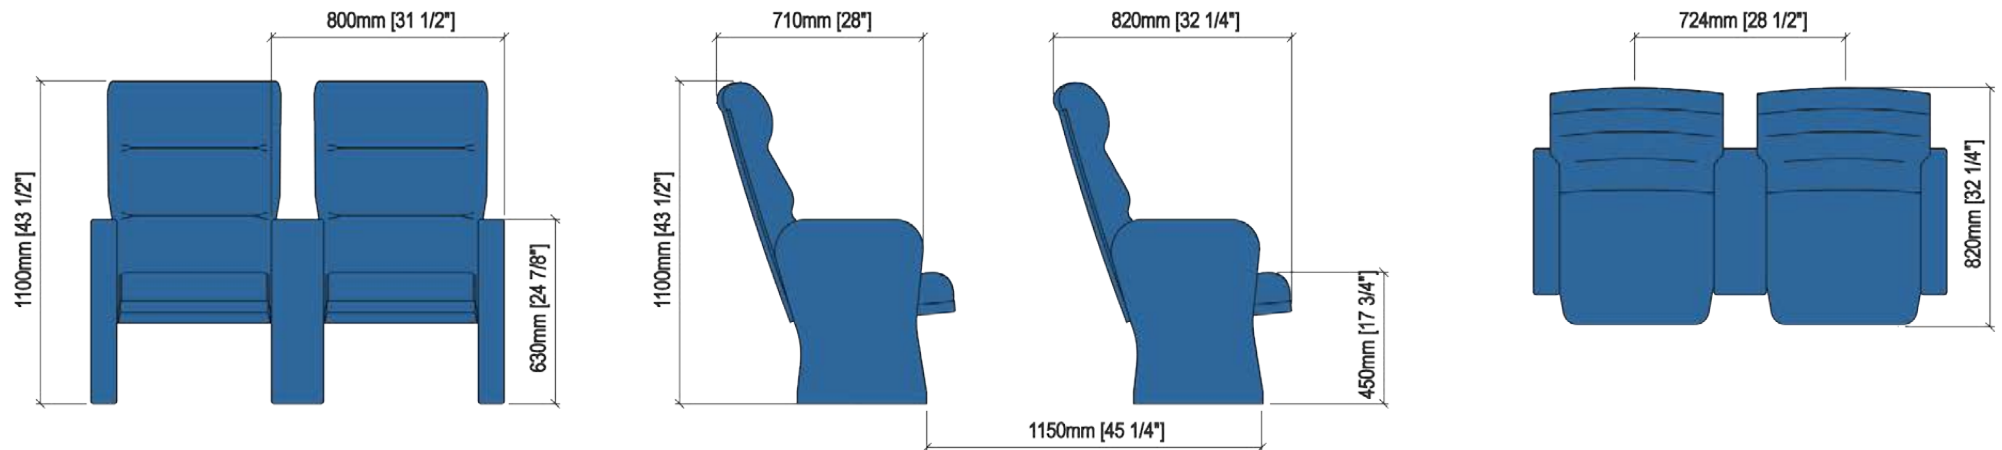

OPTIONS

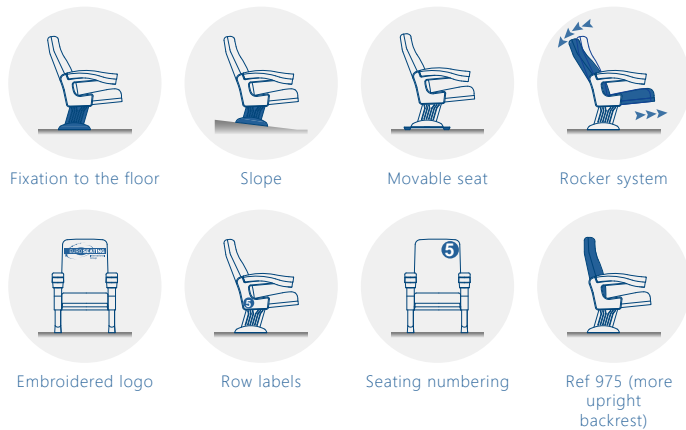

CERTIFICATES

BS 5852:2006
BS-EN 1021-1:2006
CAL TB 117-2013, SECTION 1
UNE 23.727-90 1R (M1)
UNE-EN 1021-1:2006 / UNE-EN 1021-2:2006
BS 5852:1979 Parte 1

Fabric	Fire Barrier	Foam
•		
•		
•		
•	•	
•	•	•
	•	